




LECA snooze

INSTALLATION INSTRUCTIONS | JANUARY 2025


Installation without connection box

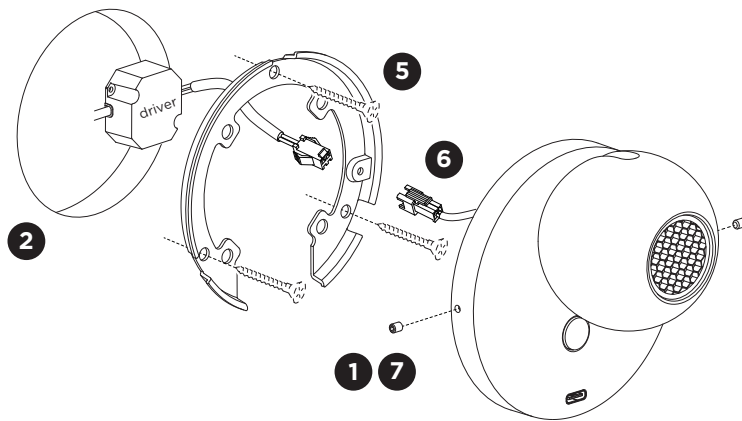

Installation with connection box

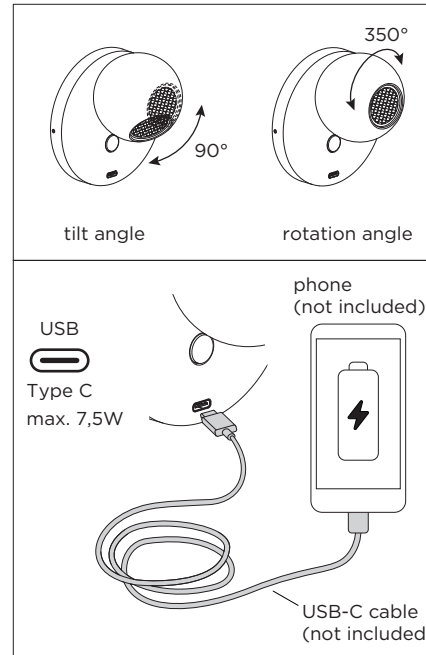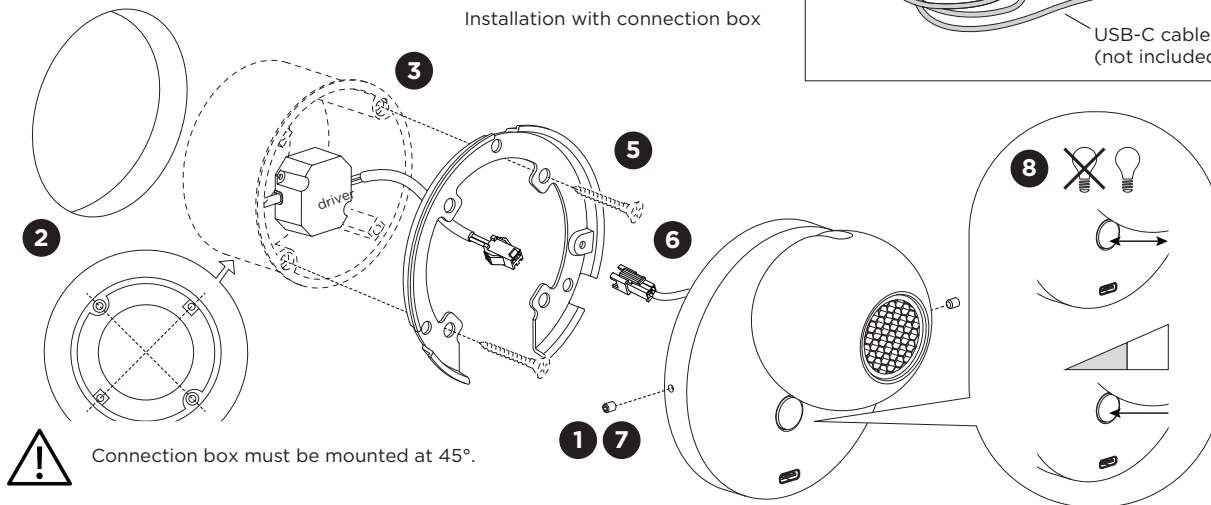

DIMENSIONS

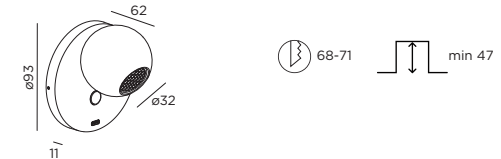


MOUNTING INSTRUCTION

- 1 Remove the mounting base from the fixture by loosening the socket screws.
- 2 Make a hole in the wall according to the prescribed dimensions.
- 3 Optional:
Install a connection box (not included) at 45°.
Use a round connection box with a depth of 61mm.

4 POWER CONNECTION

Connect to 220-240V.


Connect the earth cable.



- 5 Mount the mounting base on the wall / to the box with screws (screws are not included).
- 6 Connect the connectors of the fixture and driver.
- 7 Fix the luminaire on the base with the socket screws.
- 8 Push the button to turn the light on/off.
Hold the button to dim the light.

LECA SNOOZE


INSTALLATION INSTRUCTIONS | JANUARY 2025

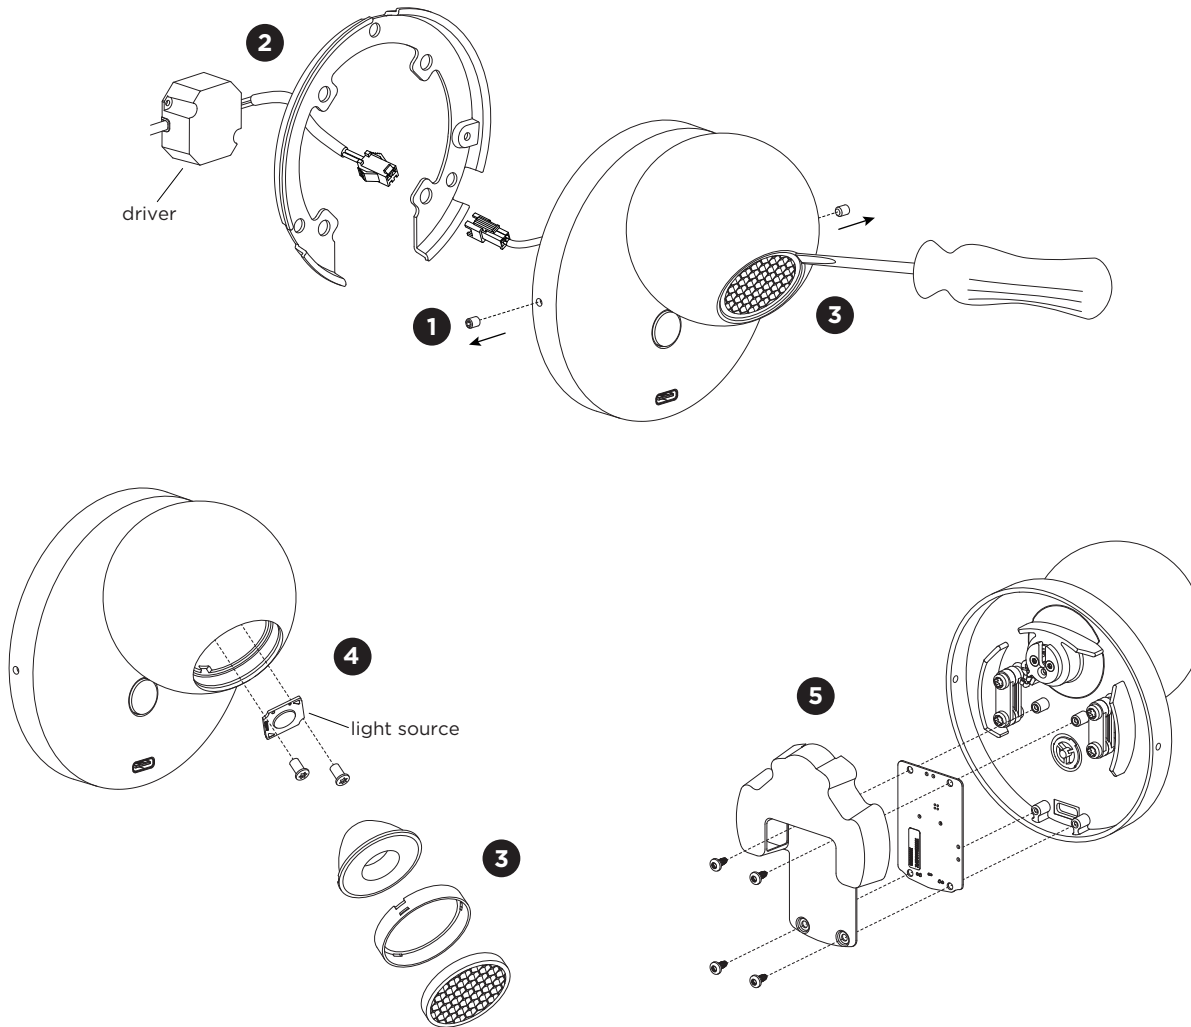

DISMOUNTING AND RECYCLING INSTRUCTIONS

Light source & driver

- 1 Loosen the socket screws from the fixture to remove it from the mounting base.
- 2 Disconnect the plugs and loosen the wires to remove the driver.
- 3 Pull out the honeycomb and snoot by using a flat tool and remove the lens.
- 4 Unscrew the screws, disconnect the wires and remove the light source.
- 5 Unscrew the cover on the backside to remove the board.



The light source is replaceable by Wever & Ducreé or by a professional with explicit authorisation. For more information please contact your local Wever & Ducreé customer service point.



The driver can be replaced by the end user.



This luminaire contains a light source with the energy class E.



WEVER & DUCRÉ
LIGHTING

WEVER & DUCRÉ BV

Spinnerijstraat 99/21, 8500 Kortrijk, Belgium
weverducre.com