

Photoelectric lighting controller

NightmatIQ Plus

Anthracite

EAN 4007841 066116

Article number 066116



twilight switch



1 - 1000 lux



IP54

1000 W

1000 W max. (LED-ready)



connectable via bluetooth



plastic free packaging



energy saving

3 years

manufacturer's warranty



CE

Function description

Technical specifications

Dimensions (L x W x H)	38 x 95 x 95 mm	Mains power supply	220 – 240 V / 50 – 60 Hz
With motion detector	No	Switching output 1, resistive	1000 W
Manufacturer's Warranty	3 years	Fluorescent lamps, electronic ballast	250 W
Settings via	Connect Bluetooth Mesh, App, Smartphone	Power consumption	0,5 W
With remote control	No	Technology, sensors	Light sensor
Version	Anthracite	Mounting height	1,80 – 4,00 m
PU1, EAN	4007841066116	Mounting height max.	4,00 m
Type	Photo-cell controller	Optimum mounting height	2 m
Application, place	Outdoors	Twilight setting	1 – 1000 lx
Application, room	outdoors, front door, courtyard & driveway, Indoors, all round the building, terrace / balcony	Basic light level function	No
Colour	Anthracite	Twilight setting TEACH	Yes
Installation site	wall	Constant-lighting control	No
Installation	Surface wiring, Wall	Interconnection	Yes
IP-rating	IP54	Type of interconnection	Master/master, Master/slave
Ambient temperature	-20 – 40 °C	Interconnection via	Bluetooth Mesh Connect
Material	Plastic		

<https://www.steinel.de>

Subject to technical modifications

09.2023 Page 1 from 2

Photoelectric lighting controller

NightmatIQ Plus


Anthracite

EAN 4007841 066116

Article number 066116



Dimension Drawing

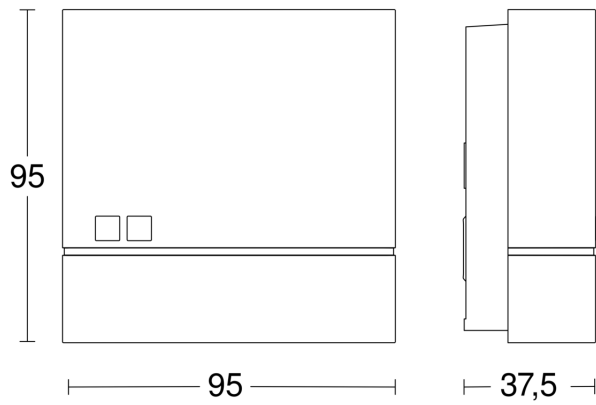

Circuit diagram

