


# MUSO

222-00058


MUSO ROUND SD SURFACE MOUNTED CEILING LUMINAIRE made of synthetic, white, similar to RAL 9003, polycarbonate cover beam 115°, light output direct, with converter, dimmability: sensor, with motion detector and daylight control, IP54



## DRAWING

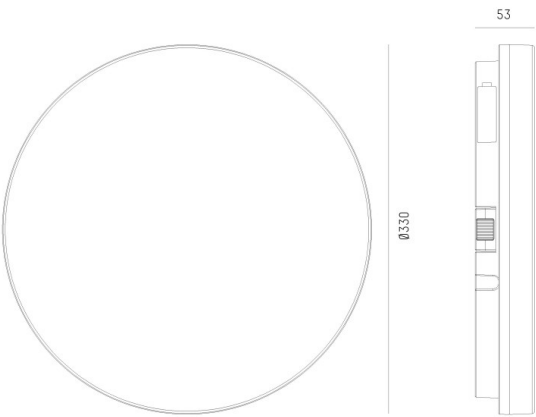

## LIGHT DISTRIBUTION CURVE

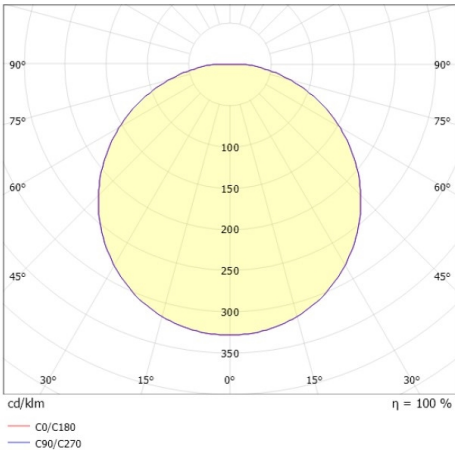

## TECHNICAL DETAILS

|                        |   |
|------------------------|---|
| System perform. [W]    | 24  |
| Bulb type              | LED                                       |
| Luminous flux [lm]     | 2850/3000                                 |
| Colour temp. [K]       | 3000/4000K                                |
| CRI                    | >80                                       |
| Optics                 | polycarbonate cover                       |
| Converter              | with converter                            |
| Dimming                | sensor                                    |
| Motion detector        | with motion detector and daylight control |
| Light output           | direct                                    |
| Beam angle [°]         | 115°                                      |
| Voltage [V]            | 220-240V 50/60Hz                          |
| Material               | synthetic                                 |
| Height [mm]            | 53  |
| Diameter [mm]          | 330                                       |
| IP protection class    | IP54                                      |
| Voltage class          | protection cl. II                         |
| Shock resistance       | IK08                                      |
| Net weight [kg]        | 1,24                                      |
| Colour lamp            | white                                     |
| RAL                    | 9003                                      |
| EAN-Number             | 9010870300071                             |
| Lifetime [h]           | L80 B10 50 000                            |
| Energy efficiency cl.  | D   |
| No. of luminaires B16A | 50  |



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.