


MUSO

222-00067

MUSO LINEAR SD SURFACE MOUNTED CEILING LUMINAIRE made of synthetic, white, similar to RAL 9003, polycarbonate cover beam 120°, light output direct, with converter, dimmability: not dimmable, IP54



DRAWING

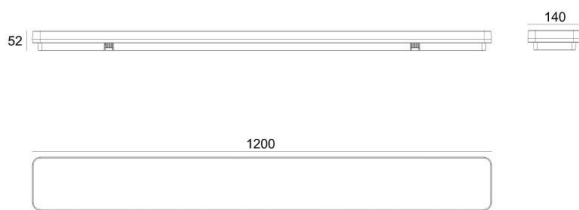


TECHNICAL DETAILS

System perform. [W]	36
Bulb type	LED
Luminous flux [lm]	4980/5260
Colour temp. [K]	3000/4000K
CRI	>80
Optics	polycarbonate cover
Converter	with converter
Dimming	not dimmable
Light output	direct
Beam angle [°]	120°
Voltage [V]	220-240V 50/60Hz
Material	synthetic

Length [mm]	1200
Width [mm]	140
Height [mm]	52
IP protection class	IP54
Voltage class	protection cl. II
Shock resistance	IK08
Net weight [kg]	2,63

Colour lamp	white
RAL	9003
EAN-Number	9010870300767
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	D
No. of luminaires B16A	5

LIGHT DISTRIBUTION CURVE

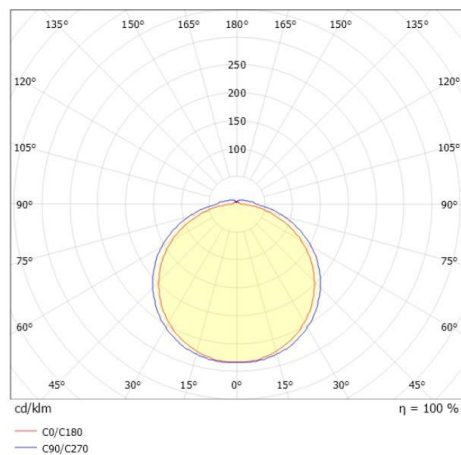

energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.