


AROK W

222-00093


AROK W SURFACE MOUNTED WALL LUMINAIRE made of aluminium, black black, similar to RAL 9005, lens beam 30°, light output direct, UGR <22, with converter, max. 160mA, dimmability: on/off, adapter/ceiling base black, IP20



DRAWING

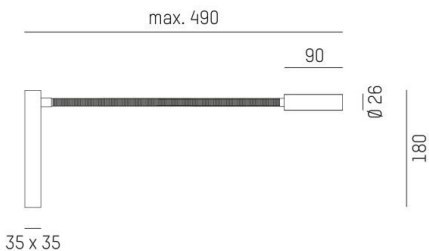

LIGHT DISTRIBUTION CURVE

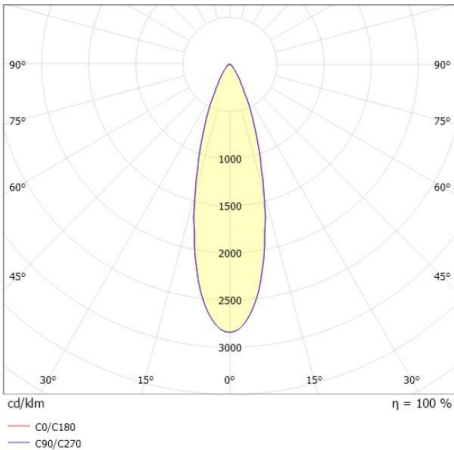

TECHNICAL DETAILS

System perform. [W]	6,5
Bulb type	LED
Luminous flux [lm]	255/280
Current sec. [mA]	160
Colour temp. [K]	2700/3000K
CRI	>90
UGR	<22
Optics	lens
Converter	with converter
Light output	direct
Beam angle [°]	30°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	35
Width [mm]	30
Height [mm]	180
Diameter [mm]	26
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	0,60
Colour lamp	black black
RAL	9005
Colour adapter/ceiling base	black
EAN-Number	9010870433366
Energy efficiency cl.	F
No. of luminaires B16A	112



energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.