


MAGIS

222-00152


MAGIS TRACK TRACK SPOTLIGHT WITH 3 PH ADAPTER made of aluminium, white, similar to RAL 9003,high-efficiently vacuum deposited synthetic reflector beam 36°, light output direct, UGR <22, swiveling 350°, tilting 90°, with converter, max. 500mA, dimmability: on/off, IP20



DRAWING

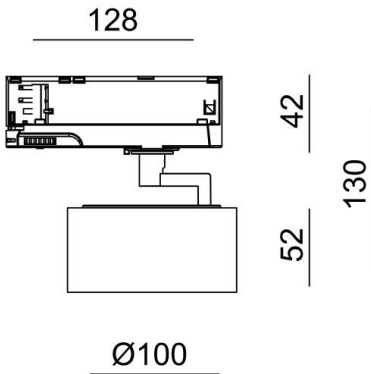

LIGHT DISTRIBUTION CURVE

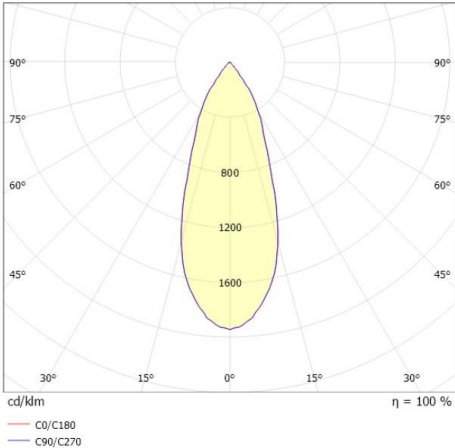

TECHNICAL DETAILS

System perform. [W]	16
Bulb type	LED
Luminous flux [lm]	1160
Current sec. [mA]	500
Colour temp. [K]	2700K
CRI	>90
UGR	<22
Optics	vacuum deposited synthetic reflector
Converter	with converter
Light output	direct
Beam angle [°]	36°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Height [mm]	130
Diameter [mm]	100
IP protection class	IP20
Voltage class	protection cl. II
Shock resistance	IK02
Net weight [kg]	0,50
Colour lamp	white
RAL	9003
EAN-Number	9010870561434
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	F
No. of luminaires B16A	48



energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.