


ELIX

276-0010990333006


ELIX R RECESSED SPOTLIGHT made of aluminium, black, similar to RAL 9005, decor black, beam 33°, light output direct, swiveling 355°, tilting 45°, without converter, max. 500mA, dimmability: see converter, IP20



DRAWING

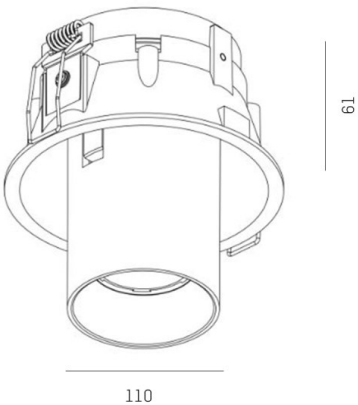

LIGHT DISTRIBUTION CURVE

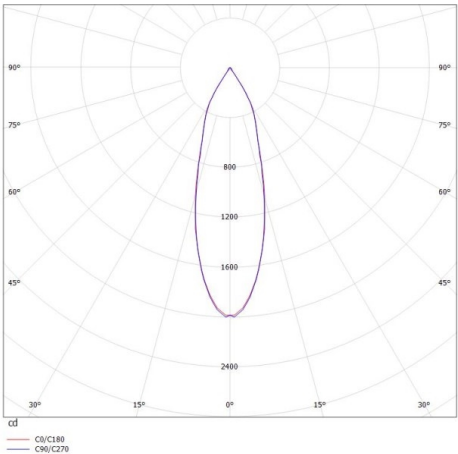

TECHNICAL DETAILS

System perform. [W]	9
Bulb type	LED 9W
Luminous flux [lm]	770
Current sec. [mA]	500
Colour temp. [K]	3000K
CRI	>90
Converter	without converter
Dimming	see converter
Light output	direct
Beam angle [°]	33°
Voltage [V]	17,8 VDC
Material	aluminium
Height [mm]	61
Diameter [mm]	110
Ceiling cutout [mm]	102
Recess depth [mm]	91
IP protection class	IP20
Voltage class	protection cl. III
Net weight [kg]	0,68
Colour lamp	black
RAL	9005
Colour decor	black
EAN-Number	9008905906701
Lifetime [h]	L80 B10 20 000
Energy efficiency cl.	E



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.