


ELIX MINI

276-0130690343056


ELIX MINI R RECESSED SPOTLIGHT made of aluminium, white, similar to RAL 9003, decor black, beam 34°, light output direct, swiveling 350°, tilting 90°, without converter, max. 350mA, dimmability: see converter, IP20



DRAWING

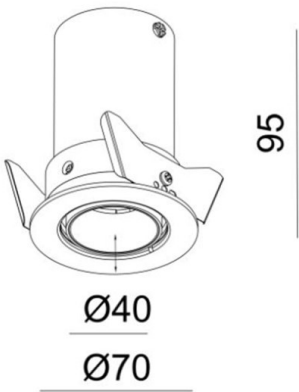

LIGHT DISTRIBUTION CURVE

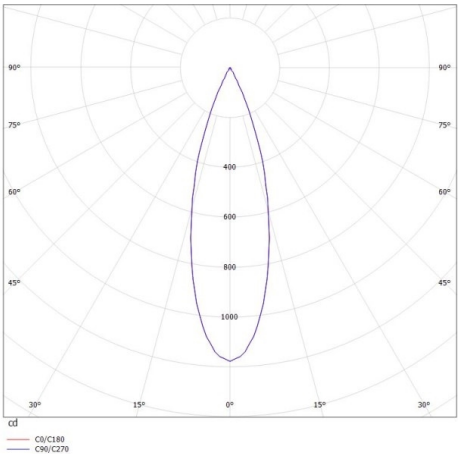

TECHNICAL DETAILS

System perform. [W]	6
Bulb type	LED 6W
Luminous flux [lm]	340
Current sec. [mA]	350
Colour temp. [K]	3000K
CRI	>90
Converter	without converter
Dimming	see converter
Light output	direct
Beam angle [°]	34°
Voltage [V]	17,6 VDC
Material	aluminium
Length [mm]	70
Height [mm]	95
Diameter [mm]	70
Ceiling cutout [mm]	64
Recess depth [mm]	125
IP protection class	IP20
Voltage class	protection cl. III
Net weight [kg]	0,29
Colour lamp	white
RAL	9003
Colour decor	black
EAN-Number	9008905906480
Lifetime [h]	L80 B10 20 000
Energy efficiency cl.	E



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.