


LINE

333-00015

LINE 25 DOUBLE W SURFACE MOUNTED WALL LUMINAIRE made of aluminium, anthrazite, similar to RAL 7016, beam 100°, light output direct / indirect, dimmability: on/off, IP65




DRAWING



TECHNICAL DETAILS

System perform. [W]	14,5
Bulb type	LED
Luminous flux [lm]	2400/2060
Colour temp. [K]	2700/3000K
CRI	>80
Light output	direct / indirect
Beam angle [°]	100°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	250
Width [mm]	60
Height [mm]	60
IP protection class	IP65
Voltage class	protection cl. I
Net weight [kg]	1,18
Colour lamp	anthrazite
RAL	7016
EAN-Number	9010870420908
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	D
No. of luminaires B16A	50

LIGHT DISTRIBUTION CURVE

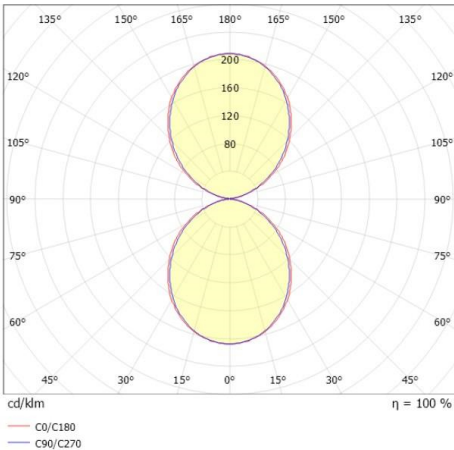

energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.