

# MONA

333-00040

MONA MINI F BOLLARD made of aluminium, anthrazite, similar to RAL 7016, lens beam 360°, accessoire: concrete anchor, light output direct, dimmability: DALI, IP65




## DRAWING

## TECHNICAL DETAILS

|                        |                  |
|------------------------|------------------|
| System perform. [W]    | 11,5             |
| Bulb type              | LED              |
| Luminous flux [lm]     | 550              |
| Colour temp. [K]       | 3000K            |
| CRI                    | >80              |
| Optics                 | lens             |
| Light output           | direct           |
| Beam angle [°]         | 360°             |
| Voltage [V]            | 220-240V 50/60Hz |
| Material               | aluminium        |
| Height [mm]            | 850              |
| Diameter [mm]          | 100              |
| IP protection class    | IP65             |
| Voltage class          | protection cl. I |
| Shock resistance       | IK10             |
| Net weight [kg]        | 2,60             |
| Colour lamp            | anthrazite       |
| RAL                    | 7016             |
| EAN-Number             | 9010870558564    |
| Lifetime [h]           | L80 B10 50 000   |
| Energy efficiency cl.  | C                |
| No. of luminaires B16A | 166              |

## LIGHT DISTRIBUTION CURVE

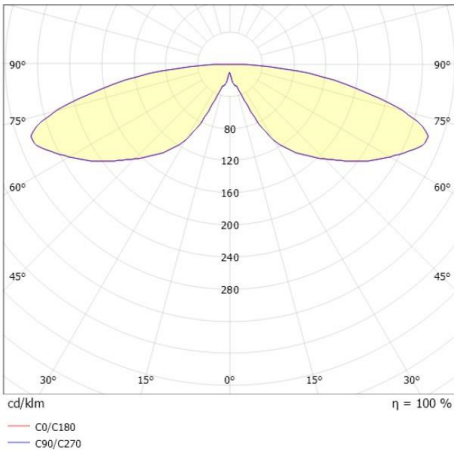

energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.