


NONA

333-00045


NONA SD SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, anthrazite, similar to RAL 7016, lens beam 20°, light output direct, UGR <16, dimmability: on/off, IP65



DRAWING

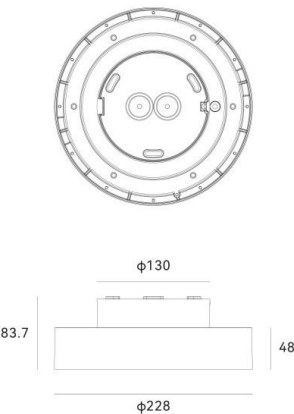

LIGHT DISTRIBUTION CURVE

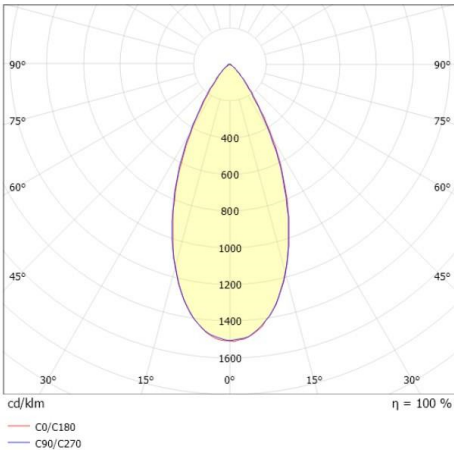

TECHNICAL DETAILS

System perform. [W]	25
Bulb type	LED
Luminous flux [lm]	1750
Colour temp. [K]	3000K
CRI	>80
UGR	<16
Optics	lens
Light output	direct
Beam angle [°]	20°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Height [mm]	84
Diameter [mm]	228
IP protection class	IP65
Voltage class	protection cl. I
Shock resistance	IK05
Net weight [kg]	1,24
Colour lamp	anthrazite
RAL	7016
EAN-Number	9010870414235
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	F
No. of luminaires B16A	38



energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.