


CADO

333-00053

CADO W SURFACE MOUNTED WALL LUMINAIRE made of aluminium, anthrazite, similar to RAL 7024, transparent glass beam asymmetric, light output direct, with converter, dimmability: on/off, IP65




DRAWING

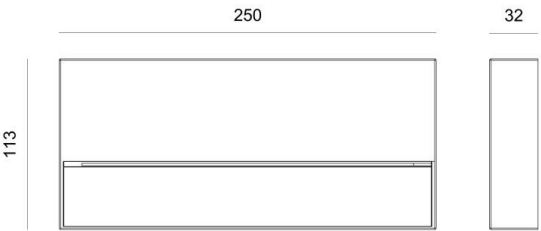

TECHNICAL DETAILS

System perform. [W]	9
Bulb type	LED
Luminous flux [lm]	195/200
Colour temp. [K]	2700/3000K
CRI	>90
Optics	transparent glass
Converter	with converter
Light output	direct
Beam angle [°]	asymmetrisch
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	250
Width [mm]	113
Height [mm]	32
IP protection class	IP65
Voltage class	protection cl. I
Net weight [kg]	1,09
Colour lamp	anthrazite
RAL	7024
EAN-Number	9010870414471
Energy efficiency cl.	E
No. of luminaires B16A	224

LIGHT DISTRIBUTION CURVE

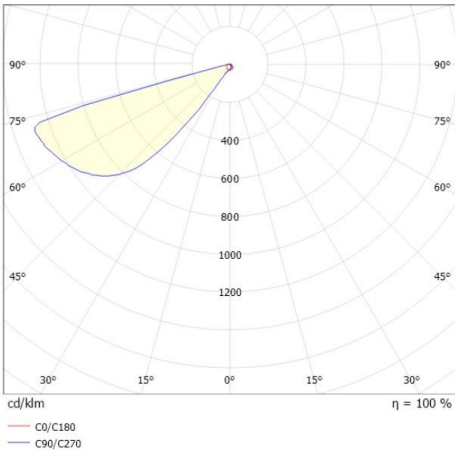

energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.