


HARK

472-0250480403011

HARK SURFACE MOUNTED SPOTLIGHT made of aluminium, anthrazite, similar to RAL 7016, beam 36°, light output direct, swiveling 350°, tilting 90°, dimmability: not dimmable, IP65 cable length 1320mm, incl. ground spike,




DRAWING

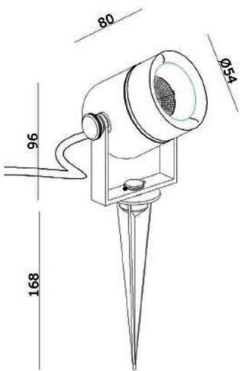

TECHNICAL DETAILS

System perform. [W]	4
Bulb type	AC LED
Luminous flux [lm]	255
Colour temp. [K]	3000K
CRI	>80
Dimming	not dimmable
Light output	direct
Beam angle [°]	36°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Width [mm]	80
Height [mm]	96
Diameter [mm]	54
IP protection class	IP65
Voltage class	protection cl. I
Net weight [kg]	0,81
Colour lamp	anthrazite
RAL	7016
EAN-Number	9008905795329
Lifetime [h]	L80 B10 20 000
Energy efficiency cl.	E

LIGHT DISTRIBUTION CURVE

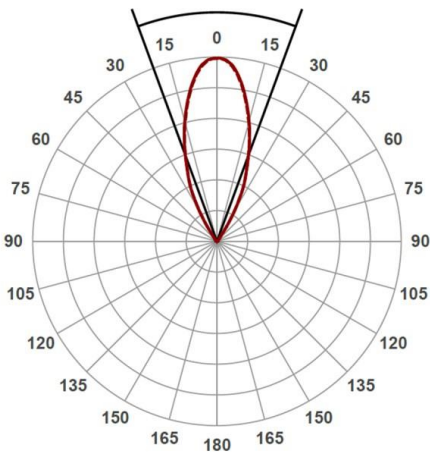

energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.