


B0

472-0827060

B0 SINGLE W SURFACE MOUNTED WALL LUMINAIRE made of aluminium, black matt, similar to RAL 9005, light output direct / indirect, swiveling 345°, with converter, dimmability: not dimmable, IP20




DRAWING

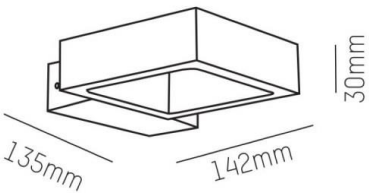

TECHNICAL DETAILS

System perform. [W]	4
Bulb type	LED
Luminous flux [lm]	155
Colour temp. [K]	2700K
CRI	>90
Converter	with converter
Dimming	not dimmable
Light output	direct / indirect
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	135
Width [mm]	30
Height [mm]	135
Troat [mm]	142
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	0,65
Colour lamp	black matt
RAL	9005
EAN-Number	9010506025873
Lifetime [h]	L80 B10 20 000
Energy efficiency cl.	E

LIGHT DISTRIBUTION CURVE

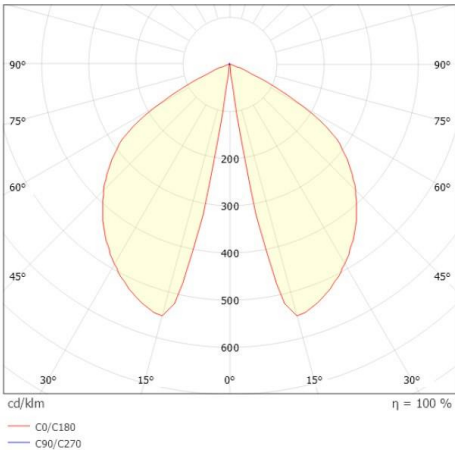

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.