

GILO

472-2429150

GILO PD SUSPENSION made of aluminium, white, similar to RAL 9003, satined, light output direct, with converter, dimmability: not dimmable, cable white, pendant length 2000mm, IP20




DRAWING

TECHNICAL DETAILS

System perform. [W]	5,5
Bulb type	LED
Luminous flux [lm]	390
Colour temp. [K]	3000K
CRI	>90
Converter	with converter
Dimming	not dimmable
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Height [mm]	90
Pendant length [mm]	2000
Diameter [mm]	80
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	0,76
Colour lamp	white
RAL	9003
Colour of glass/shade	satined
Electric wire	white
EAN-Number	9010506027150
Lifetime [h]	L80 B10 20 000
Energy efficiency cl.	D

LIGHT DISTRIBUTION CURVE

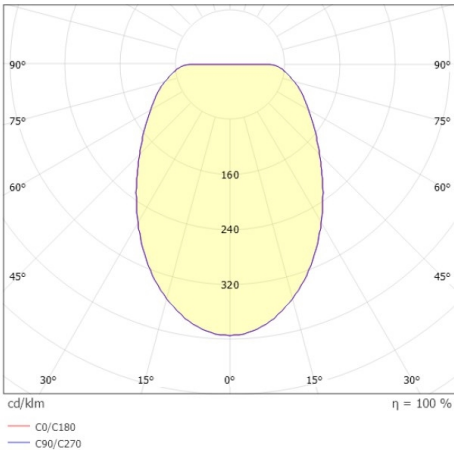

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.