

# LIRO

472-30003660

LIRO R RECESSED SPOTLIGHT made of aluminium, black, similar to RAL 9005, beam 10°, light output direct, without converter, max. 500mA, dimmability: see converter, IP20



## DRAWING




45°


1 - 20 mm



62 x 62 mm, **ET 65 mm**

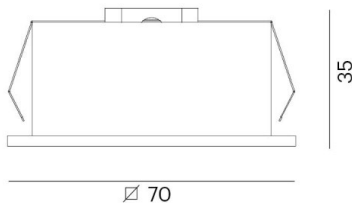

## LIGHT DISTRIBUTION CURVE

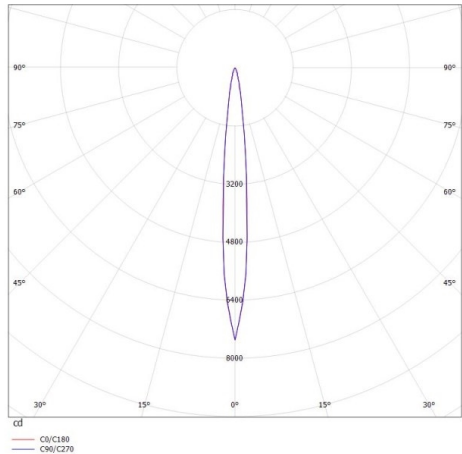

## TECHNICAL DETAILS

|                       |                    |
|-----------------------|--------------------|
| Bulb type             | LED 6W             |
| Luminous flux [lm]    | 460                |
| Current sec. [mA]     | 500                |
| Colour temp. [K]      | 2700K              |
| CRI                   | >90                |
| Converter             | without converter  |
| Dimming               | see converter      |
| Light output          | direct             |
| Beam angle [°]        | 10°                |
| Material              | aluminium          |
| Length [mm]           | 70                 |
| Width [mm]            | 70                 |
| Height [mm]           | 35                 |
| Ceiling cutout [mm]   | 62x62              |
| Recess depth [mm]     | 65                 |
| IP protection class   | IP20               |
| Voltage class         | protection cl. III |
| Net weight [kg]       | 0,10               |
| Colour lamp           | black              |
| RAL                   | 9005               |
| EAN-Number            | 9010506139648      |
| Lifetime [h]          | L80 B10 20 000     |
| Energy efficiency cl. | G                  |



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.