

INSTALLATION MANUAL

50140FA

LED
BUILT IN





90
CRI




NOT
DIMMABLE

230V | SMD LED | 36W | IP20 | Aluminium + PC
Complete with 950mA driver.

Recessed fitting for 625x625mm T-rail false ceilings.



one
LIGHT

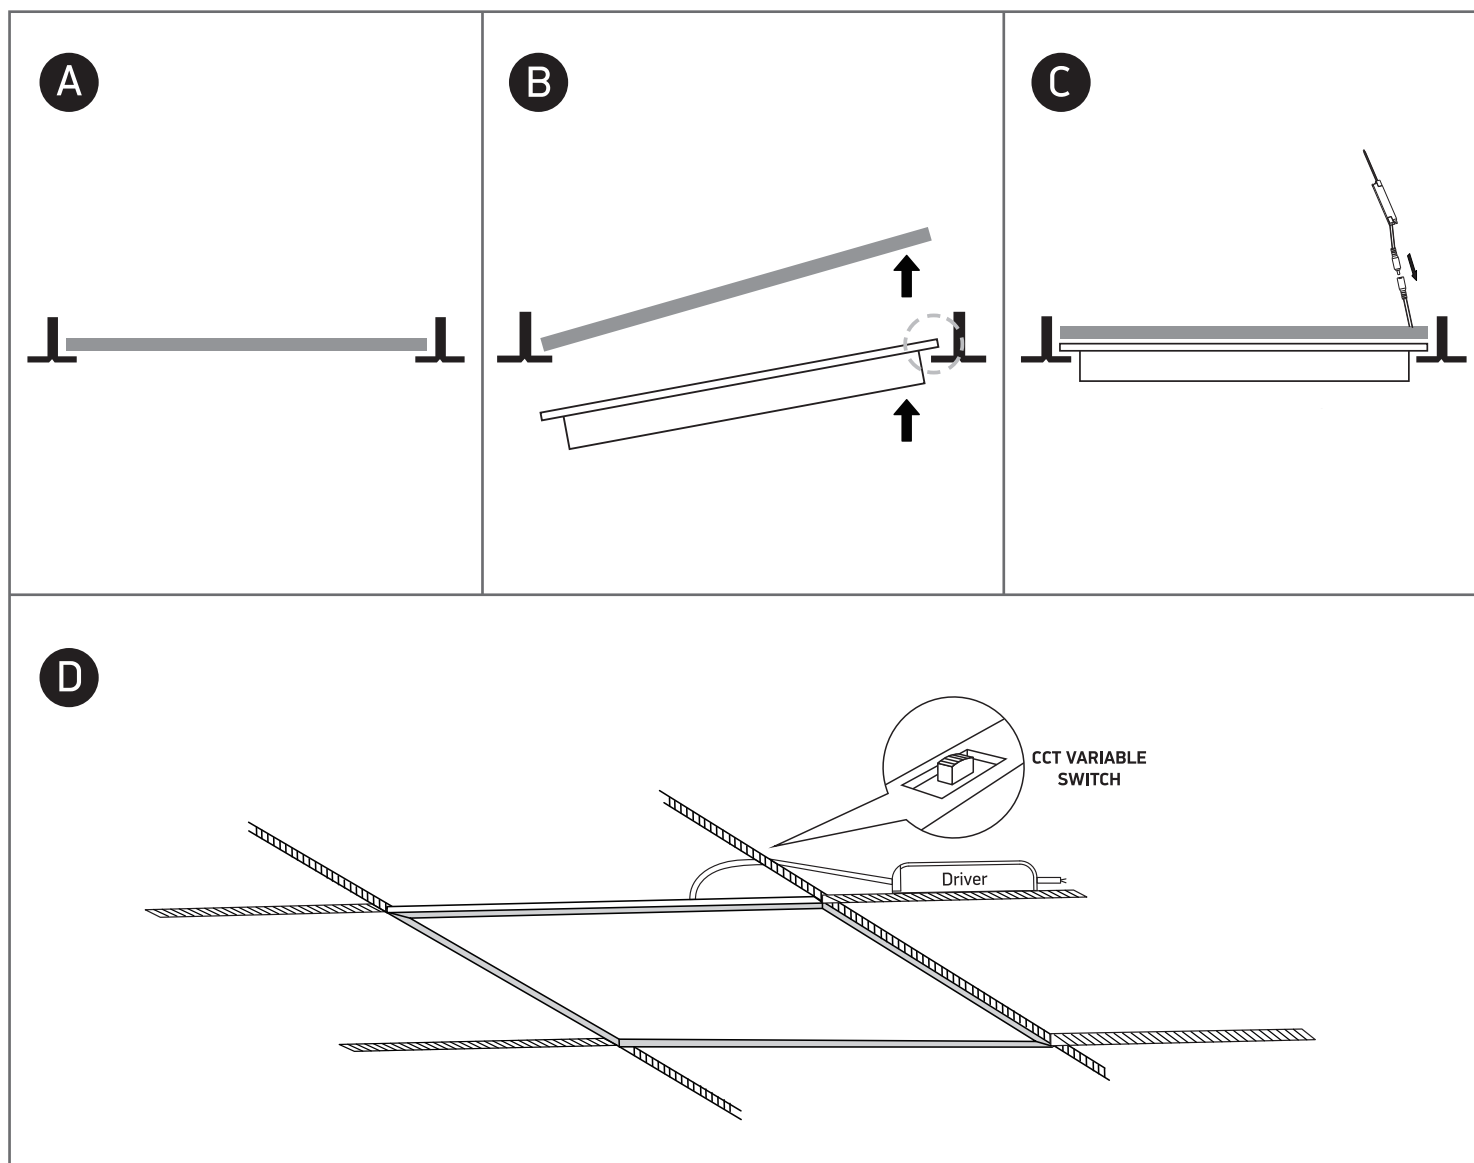

Warnings:

1. Make sure that the product is installed properly before connecting to electricity.
2. Do not cover the fitting.
3. Maintenance and installation should only be carried out by a professional electrician.

www.1-light.eu