

Artikel Nr.: 730330

Wandaufbauleuchte, Rilongo A, Basaltgrau RAL 7012, 220-240V AC/50-60Hz, 1x max. 18,00 W

Technische Daten

Charakteristik

Material	Aluminium Druckguss / Kunststoff
Farbe	Basaltgrau RAL 7012 / Weiß
Optik	
im Lieferumfang	




Elektrische Daten

Leistung	1x max. 18,00 W
Eingangsspannung	220-240V AC/50-60Hz
Eingangsstrom	
Fassung / Sockel	E27
Anzahl Sockel	1
Netzgerät	
Ansteuerung	dimmbar über optionales Leuchtmittel
Anschlussmöglichkeit	Klemme
Schutzklasse I, II, III	I



Artikel Nr.: 730330

Wandaufbauleuchte, Rilongo A, Basaltgrau RAL 7012, 220-240V AC/50-60Hz, 1x max. 18,00W

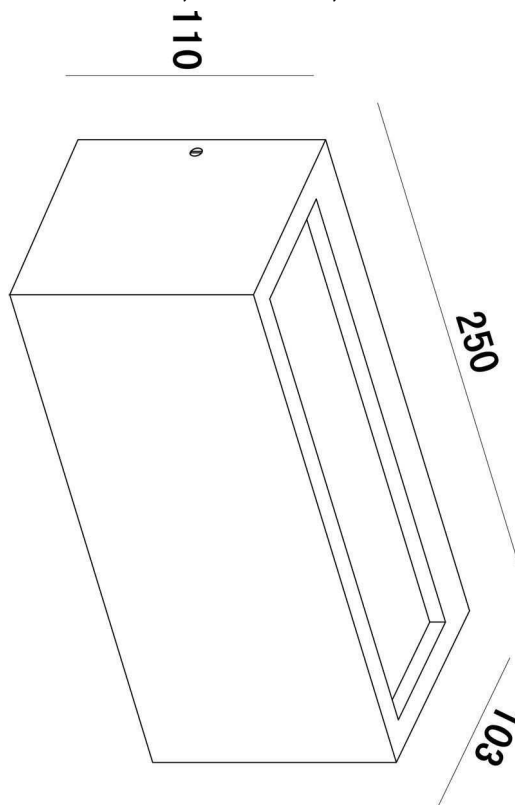

Lichtrichtung

Dreh- und Schwenkbereich	feststehend
Neigungswinkel	
Abstrahlverhalten	2 Side
Reflektor / Linse	symmetrisch

Abmessungen und Gewicht

Länge	250,00
Breite	110,00
Höhe	103,00
Durchmesser	0,00
Deckenabhängung	0,00
Gewicht	1018 g

Sockelmaß


Länge	250,00
Breite	110,00
Höhe	0,00
Durchmesser	0,00

Artikel Nr.: 730330

Wandaufbauleuchte, Rilongo A, Basaltgrau RAL 7012, 220-240V AC/50-60Hz, 1x max. 18,00W

Grenzwerte

Betriebstemperatur	-20°C - +40°C
Lagertemperatur	-20°C - +40°C
IP - Schutzart	IP54

EEL	Die Leuchte ist geeignet für Leuchtmittel der Energieeffizienzklassen A++ bis E
IP54	Schutz gegen das Eindringen von Staub. (Staubschutz) Geschützt gegen Spritzwasser.
	Leuchte der Schutzklasse I bei der der Schutz gegen elektrischen Schlag nicht allein auf der Basisisolierung beruht, sondern die eine zusätzliche Sicherheitsvorkehrung derart enthält, dass berührbare leitfähige Teile mit Mitteln zum Anschluss an den Schutzleiter der festen Installation ausgerüstet sind, so dass im Fehlerfall der Basisisolierung berührbare leitfähige Teile nicht aktiv werden können.

Article no.: 730330

Surface mounted wall lamp, Rilongo A, Basalt grey RAL 7012, 220-240V AC/50-60Hz, 1x max. 18,00W

Technical Data**General Characteristics**

Material	aluminum die casting / plastic
Colour	Basalt grey RAL 7012 / white
Optics	
included in delivery	

**Electrical Characteristics**

Power	1x max. 18,00 W
Input voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation)	E27
Number of bases	1
Power supply unit	
Electronically reversible	dimnable via optional bulb
Connection possibility	clamp
Protection class I, II, III	I



Article no.: 730330

Surface mounted wall lamp, Rilongo A, Basalt grey RAL 7012, 220-240V AC/50-60Hz, 1x max. 18,00W

Light Direction


Rotating and tilting range	fixed
Angle of inclination	
Radiation direction	2 Side
Reflector / lense	symmetrisch

Dimensions & Weight

Length	250,00
Width	110,00
Height	103,00
Diameter	0,00
Suspensions from ceiling	0,00
Product Weight	1018 g

Base dimensions

Length	250,00
Width	110,00
Height	0,00
Diameter	0,00

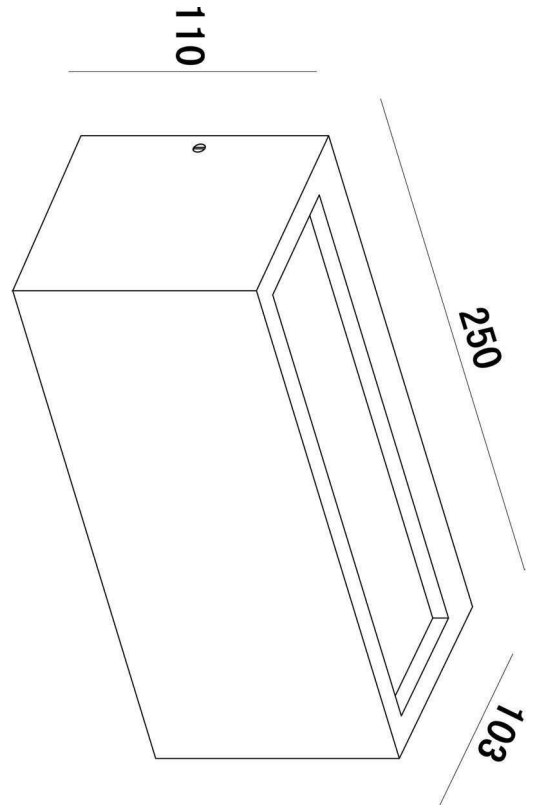


Article no.: 730330

Surface mounted wall lamp, Rilongo A, Basalt grey RAL 7012, 220-240V AC/50-60Hz, 1x max. 18,00W

Absolute maximum ratings

Working temperature	-20°C - +40°C
Storage temperature	-20°C - +40°C
IP - Code	IP54

EEL	The luminaire is suitable for lamps of energy efficiency classes A++ to E.
IP54	Protection against penetration of dust. (dust protected) Protection against penetration of splashing water.
	Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.
