

Artikel Nr.: 730332

Stehleuchte, Facado A, anthrazit, 220-240V AC/50-60Hz, 1x max. 20,00 W

**Technische Daten****Charakteristik**

Material	Aluminium Druckguss
Farbe	anthrazit
Optik	
im Lieferumfang	


Elektrische Daten

Leistung	1x max. 20,00 W
Eingangsspannung	220-240V AC/50-60Hz
Eingangsstrom	
Fassung / Sockel	E27
Anzahl Sockel	1
Netzgerät	
Anschlussmöglichkeit	Klemme
Schutzklasse I, II, III	I



Artikel Nr.: 730332

Stehleuchte, Facado A, anthrazit, 220-240V AC/50-60Hz, 1x max. 20,00 W

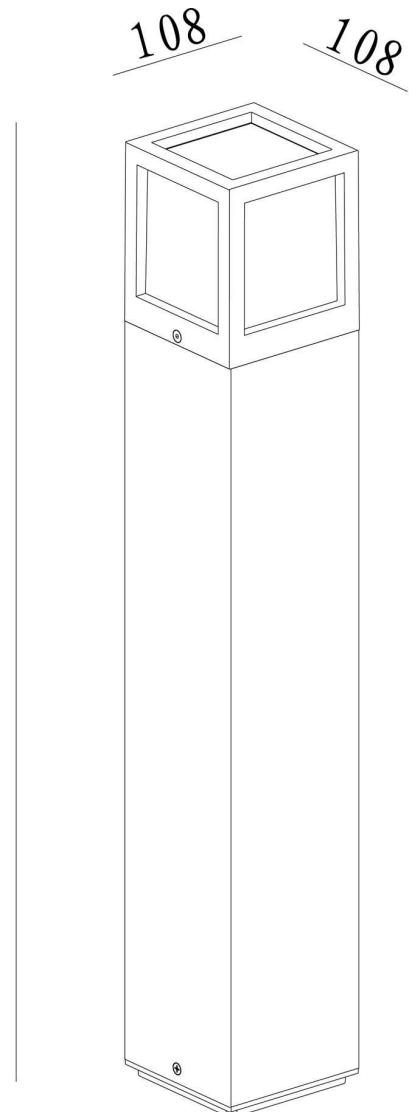**Lichtrichtung**

Dreh- und Schwenkbereich	feststehend
Neigungswinkel	
Abstrahlverhalten	
Reflektor / Linse	symmetrisch

Abmessungen und Gewicht

Länge	108 mm
Breite	108 mm
Höhe	650 mm
Durchmesser	
Gewicht	2875 g

650

Grenzwerte

Betriebstemperatur	-20°C - +40°C
Lagertemperatur	-20°C - +40°C
IP - Schutzart	IP44

⑧

EEI

Die Leuchte ist geeignet für Leuchtmittel der Energieeffizienzklassen A++ bis E

IP44

Schutz gegen das Eindringen von Fremdkörper > 1 mm. Geschützt gegen Spritzwasser.



Leuchte der Schutzklasse I
 bei der der Schutz gegen elektrischen Schlag nicht allein auf der Basisisolierung beruht, sondern die eine zusätzliche Sicherheitsvorkehrung derart enthält, dass berührbare leitfähige Teile mit Mitteln zum Anschluss an den Schutzleiter der festen Installation ausgerüstet sind, so dass im Fehlerfall der Basisisolierung berührbare leitfähige Teile nicht aktiv werden können.



Aufgrund des komplexen Herstellungsprozesses von LED stellen die angegebenen Werte nur rein statistische Größen dar und müssen nicht zwingend den tatsächlichen Parametern jedes einzelnen LED-Moduls entsprechen, sondern können von den typischen Werten abweichen.

Article no.: 730332

Floor lamp, Facado A, anthracite, 220-240V AC/50-60Hz, 1x max. 20,00 W

**Technical Data****General Characteristics**

Material	aluminum die casting
Colour	anthracite
Optics	
included in delivery	

Electrical Characteristics

Power	1x max. 20,00 W
Input Voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation)	E27
Number of Bases	1
Power supply unit	
Connection possibility	clamp
Protection class I, II, III	I



Article no.: 730332

Floor lamp, Facado A, anthracite, 220-240V AC/50-60Hz, 1x max. 20,00 W

Light Direction


Rotating and tilting range	fixed
Angle of inclination	
Radiation direction	
Reflector / lense	symmetrisch

Dimensions & Weight

Length	108 mm
Width	108 mm
Height	650 mm
Diameter	
Product Weight	2875 g

Absolute maximum ratings

Working temperature	-20°C - +40°C
Storage temperature	-20°C - +40°C
IP - Code	IP44

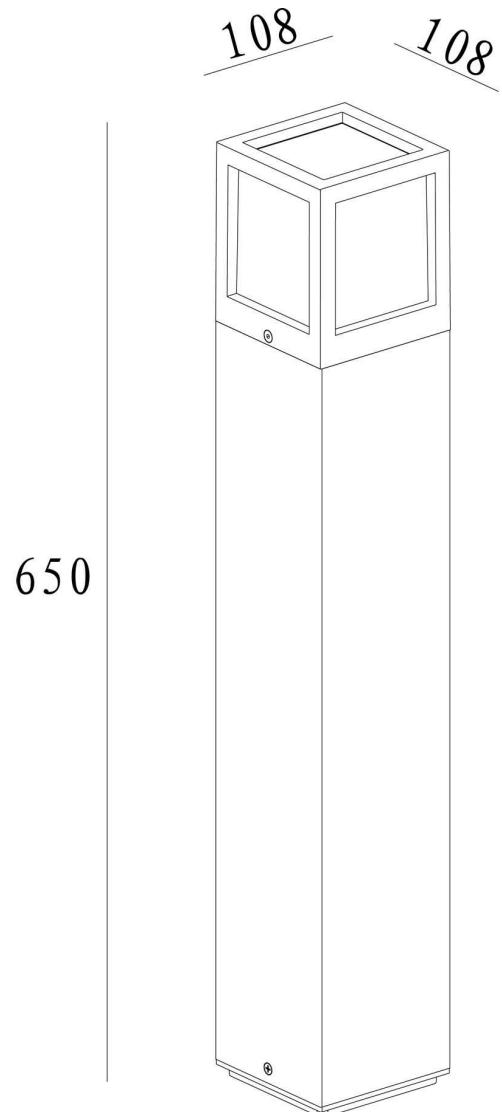

EEI	The luminaire is suitable for lamps of energy efficiency classes A++ to E.
IP44	Protection against penetration of foreign objects > 1 mm. Protection against penetration of splashing water.
	Lightnings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.
	Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.