

**Artikel Nr.: 843275**

Netzgerät, BASIC, DIM, CV, HV DMX 24V/135W



IP20 CE

**Elektrische Daten**

Betriebsart	spannungskonstant	Eingangsspannung	100-240V AC/50-60Hz
Leistung	135,00 W	Leistungsfaktor	0,9
Ausgangsspannung	24V DC	Anschlußmöglichkeit	Klemme
Ausgangsstrom	0-5630 mA		

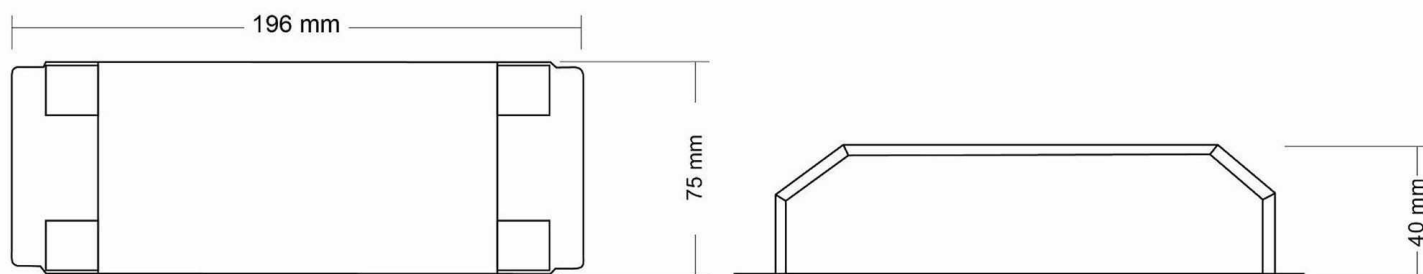
**Produkteigenschaften**

Schutzklasse I	Überspannungsschutz
SELV Schutzkleinspannung	Lampenbetriebsgerät 110
Kurzschlußfest	Möbeleinbau nicht geeignet
Überlastschutz	ErP Standby-Stromverbrauch < 0,5 W
Übertemperaturschutz	LVD Sicherheit nach EN 61347
Sicherheitstrafo	EMC Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547
dimmbar - DMX512	EMC Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

**Artikel Nr.: 843275**

Netzgerät, BASIC, DIM, CV, HV DMX 24V/135W

**Abmessungen und Gewicht****Grenzwerte**

Länge	196,00 mm	Betriebstemperatur	-30°C - +40°C
Breite	75,00 mm	Gehäusetemperatur	0 °C
Höhe	40,00 mm	max. Menge Sicherungsautomaten	B10A=7, B16A=12, C10A=16, C16A=25
Durchmesser	0,00 mm	max. Einschaltstrom	23A/320µs
Gewicht	644 g	kapazitive Last	

Article No.: 843275

Power supply unit, BASIC, DIM, CV, HV DMX 24V/135W













IP20 CE

### Electrical Characteristics

Operating mode	constant voltage	Input voltage	100-240V AC/50-60Hz
Power	135,00 W	Power factor	0,9
Output voltage	24V DC	Connection possibility	clamp
Output current	0-5630 mA		

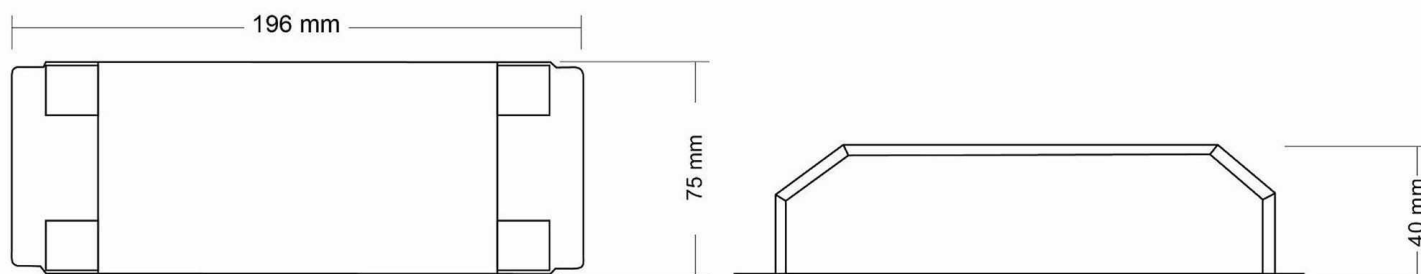
### Product features

 Protection class I	 Overvoltage protection
 Low voltage protection	 Lamp control gear 110
 Short circuit protection	 Not suitable for furniture installation
 Overload protection	<b>ErP</b> Standby-power consumption < 0,5 W
 Overheating protection	<b>LVD</b> Safety according to EN 61347
 Safety transformer	<b>EMC</b> Interference suppression + immunity according to EN 55015 + EN 61547
 dimmable - DMX512	<b>EMC</b> Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

**Article No.: 843275**

Power supply unit, BASIC, DIM, CV, HV DMX 24V/135W

**Dimensions & Weight****Absolute maximum ratings**

Length	196,00 mm	Operating temperature	-30°C - +40°C
Width	75,00 mm	Case temperature	0 °C
Height	40,00 mm	max. amount of circuit breakers	B10A=7, B16A=12, C10A=16, C16A=25
Diameter	0,00 mm	max. inrush current	23A/320µs
Product weight	644 g	capacitive load	