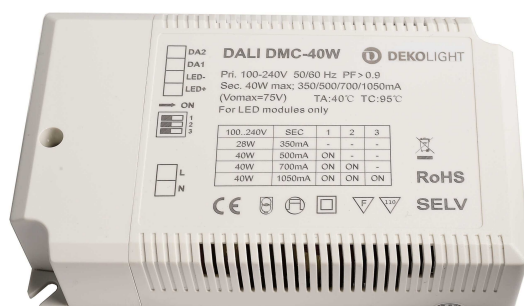


**Artikel Nr.: 843276**

Netzgerät, BASIC, DIM, Multi CC, DMC-40W



IP20 CE

**Elektrische Daten**

Betriebsart	stromkonstant	Eingangsspannung	110-240V AC/50-60Hz
Leistung	28,00-40,00 W	Leistungsfaktor	0,9
Ausgangsspannung	3-39V DC	Anschlußmöglichkeit	Klemme
Ausgangsstrom	350/500/700/1050 mA		

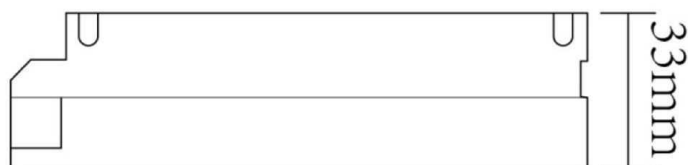
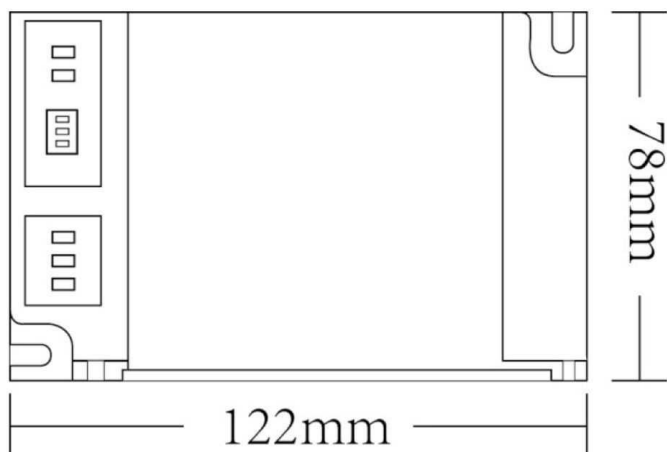
**Produkteigenschaften**

	Schutzklasse II		Überspannungsschutz
SELV	Schutzkleinspannung		Lampenbetriebsgerät 110
	Kurzschlußfest		Möbeleinbau nicht geeignet
	Überlastschutz	ErP	Standby-Stromverbrauch < 0,5 W
	Übertemperaturschutz	LVD	Sicherheit nach EN 61347
	Sicherheitstrafo	EMC	Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547
	dimmbar - DALI-Bus nach IEC 62386 DALI 1.0 / Push	EMC	Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

**Artikel Nr.: 843276**



Netzgerät, BASIC, DIM, Multi CC, DMC-40W

**Abmessungen und Gewicht****Grenzwerte**

Länge	122,00 mm	Betriebstemperatur	-20°C - +50°C
Breite	78,00 mm	Gehäusetemperatur	95 °C
Höhe	33,00 mm	max. Menge Sicherungsautomaten	B10A=38, B16A=62, C10A=77, C16A=124
Durchmesser	0,00 mm	max. Einschaltstrom	18A/60µs
Gewicht	223 g	kapazitive Last	

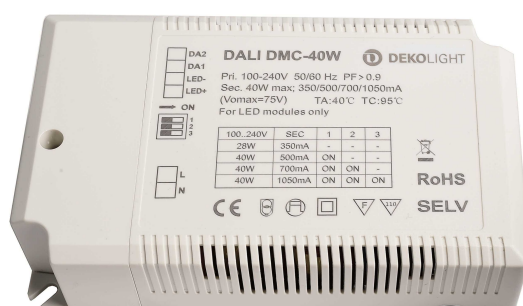
**Multi-CC variable Leistungs-/Spannungsbereiche / Multi-CC variable power/voltage ranges**

Stromstärke / Current	Leistung / Power	Spannung / Voltage
350mA	7,00W - 28,00W	20V - 75V
500mA	10,00W - 40,00W	20V - 75V
700mA	14,00W - 40,00W	20V - 58V
1050mA	21,00W - 40,00W	20V - 39V

**max. 2 Lampen je Kanal - Spannungsbereich überprüfen! / max. 2 lamps per channel - check voltage range!**

Article No.: 843276

Power supply unit, BASIC, DIM, Multi CC, DMC-40W













IP20 CE

### Electrical Characteristics

Operating mode	constant current	Input voltage	110-240V AC/50-60Hz
Power	28,00-40,00 W	Power factor	0,9
Output voltage	3-39V DC	Connection possibility	clamp
Output current	350/500/700/1050 mA		

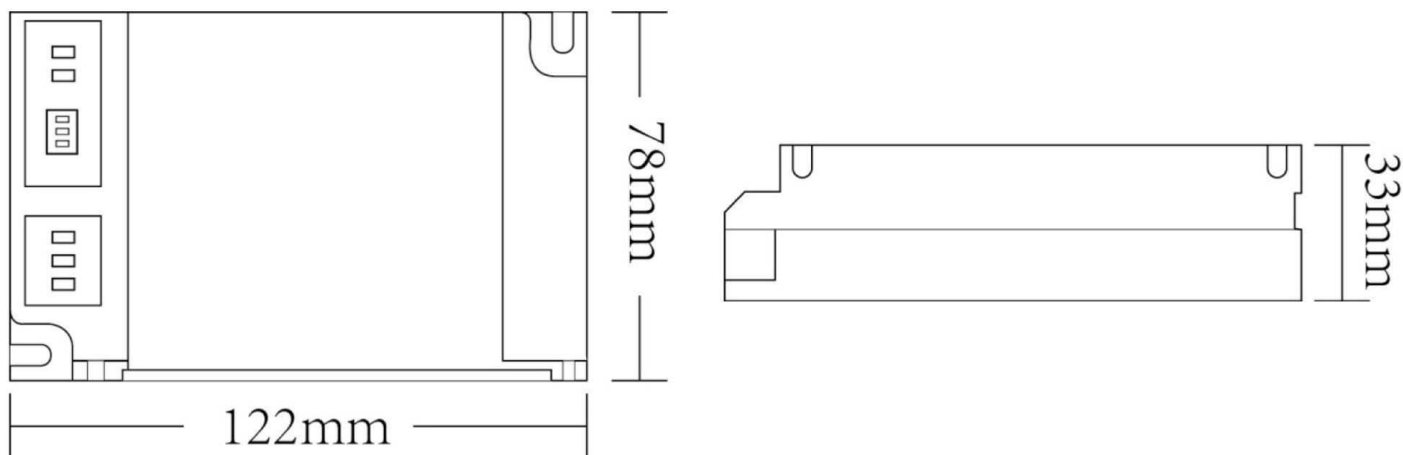
### Product features

	Protection class II		Overvoltage protection
	Low voltage protection		Lamp control gear 110
	Short circuit protection		Not suitable for furniture installation
	Overload protection	<b>ErP</b>	Standby-power consumption < 0,5 W
	Overheating protection	<b>LVD</b>	Safety according to EN 61347
	Safety transformer	<b>EMC</b>	Interference suppression + immunity according to EN 55015 + EN 61547
	dimnable - DALI-Bus according to IEC 62386 DALI 1.0 / Push	<b>EMC</b>	Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

**Article No.: 843276**

Power supply unit, BASIC, DIM, Multi CC, DMC-40W



**Dimensions & Weight**

Length	122,00 mm
Width	78,00 mm
Height	33,00 mm
Diameter	0,00 mm
Product weight	223 g

**Absolute maximum ratings**

Operating temperature	-20°C - +50°C
Case temperature	95 °C
max. amount of circuit breakers	B10A=38, B16A=62, C10A=77, C16A=124
max. inrush current	18A/60µs
capacitive load	

**Multi-CC variable Leistungs-/Spannungsbereiche / Multi-CC variable power/voltage ranges**

Stromstärke / Current	Leistung / Power	Spannung / Voltage
350mA	7,00W - 28,00W	20V - 75V
500mA	10,00W - 40,00W	20V - 75V
700mA	14,00W - 40,00W	20V - 58V
1050mA	21,00W - 40,00W	20V - 39V

**max. 2 Lampen je Kanal - Spannungsbereich überprüfen! / max. 2 lamps per channel - check voltage range!**

