




PROJECT

TYPE

NOTES

QUANTITY

DATE

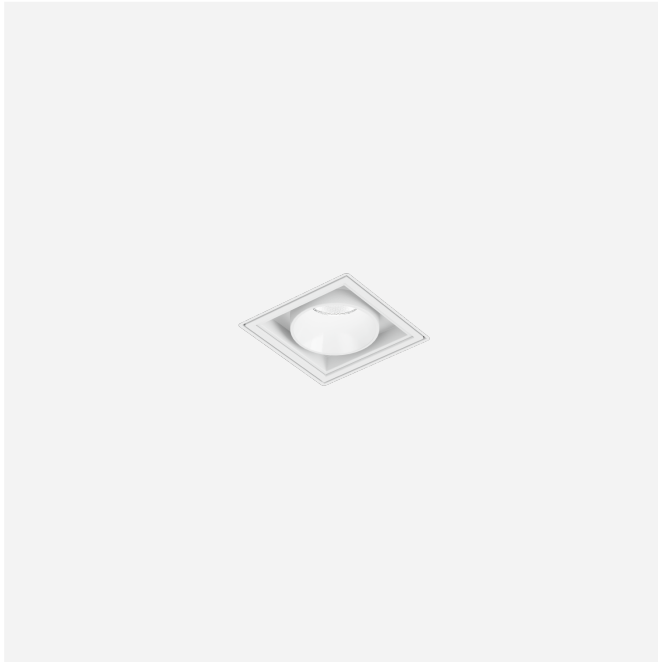

Squared ceiling recessed downlight made from die-cast aluminium; for trimless installation; surface White Matt powder coated; matt texture; with reflector made from plastic in Glossy White; installation without tools using wire springs; suitable for ceiling thickness of 4-26 mm; recessed depth 60 mm; PCB; light colour selectable via dip switch (2700K / 3000K); to be set before installation; beam angle 39°; degree of protection IP20; Class 3; driver not included; light source replaceable by Wever & Ducré or by a professional with explicit authorization;



Ø65

LUMINAIRE

Ceiling
 Recessed
 Reflector: White
 RAL 9010 + No matching RAL
 a
 IP20
 Interior
 125 lm

LED Module

2700 K / 3000 K
 CRI ≥ 90
 L80 / 50000h
 ≤ 3 SDCM (initial MacAdam)

Optical

Medium (standard)
 beam angle 39°

Electrical

excl. driver
 6 V
 Class III
 Standard

Physical

length 65 mm
 width 65 mm
 height 48 mm
 0.08 kg
 wire springs

Cutout

diameter 54-58 mm
 min. ceiling thickness 4 mm
 max. ceiling thickness 26 mm
 recessed depth 60 mm

datasheet.quicksum.material

Aluminium

^a Colour may deviate slightly due to production conditions

[109961WW9] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.



ELECTRICAL ACCESSORIES

Driver

Type	Colour	Voltage	L·W·H (MM)	Item number
3.5W 350mA 2.7-10V		2,7-10V	65-29-18	90213102
7W 350mA 12-21V phase-cut dim		12-21V	68-33-22	90223301
14W 350mA 10-40V DALI-2 push dim		10-40V	166-29-21	90243502