




PROJECT

TYPE

NOTES

QUANTITY

DATE

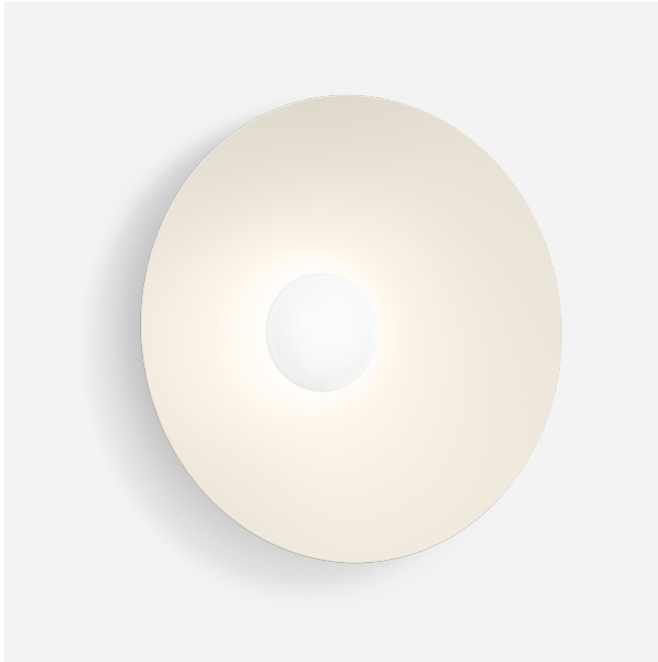

Round shape wall surface mounted luminaire with diffuse light; aluminium base in White Matt wet painted; matt texture; aluminium shade; surface Live Simple wet painted; matt texture; RAL 090 9005; white opal glass handblown; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 2700 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90 ; CRI (Colour Rendering Index) ≥ 90 ; degree of protection IP20; Class 1; driver included; light source replaceable by Wever & Ducré or by a professional with explicit authorization; control gear replaceable by end-user;

Luminaire

Wall
Surface
Live Simple
RAL 090 9005 ^a
IP20
Interior
455 lm

Module

2700 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
617 lm
76 lm/W ^b

Optical

Opal
CIE flux code: 15 40 69 50 100

Electrical

phase-cut dim
220 - 240 V
system 10.1 W
Class 1

Physical

diameter 500 mm
height 138 mm
1.31 kg

LIGHT DISTRIBUTION

