




PROJECT

TYPE

NOTES

QUANTITY

DATE

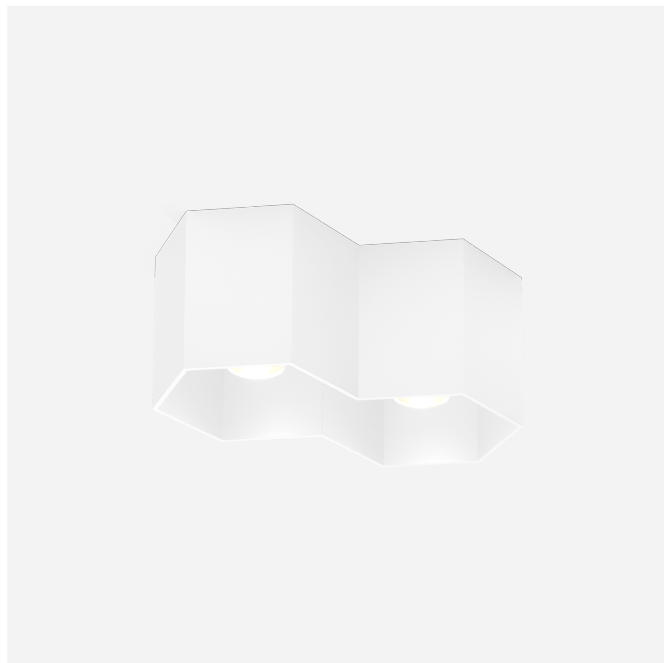

Hexagonal ceiling surface mounted downlight made from die-cast aluminium; surface White Matt; powder coated; matt texture; RAL 9010; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; 220 - 240 V; degree of protection IP20; Class 1; UGR ≤ 13 ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above $65^\circ \leq 1500 \text{ cd/m}^2$; optional single inner cover available; light source replaceable by Wever & Ducré or by a professional with explicit authorization;

Luminaire

Ceiling
Surface
White Matt
RAL 9010 ^a
IP20
Interior
1340 lm

Module

2700 K
CRI ≥ 90
initial MacAdam ≤ 3 SDCM
1354 lm
86 lm/W ^b

Optical

Standard
beam angle 21°
CIE flux code: 94 99 100 100
100

Electrical


phase-cut dim
220 - 240 V
system 16.0 W
Class 1

Physical

length 220 mm
width 127 mm
height 100 mm
1.13 kg

^a datasheet.footnote.ral_footnote

^b datasheet.footnote.no-electrical-losses



**OPTICAL ACCESSORIES****Single Inner Cover**

| Type | Colour | Voltage | L·W·H (MM) | Item number |
|-----------------|--------|---------|------------|-------------|
| HEXO max. 10W | Black | | 77.4·67·54 | 911031B1 |
| HEXO max. 10W | Gold | | 77.4·67·54 | 911031G1 |
| HEXO max. 10W | White | | 77.4·67·54 | 911031W1 |