



PROJECT

---

TYPE

---

NOTES


---

QUANTITY

---

DATE

---

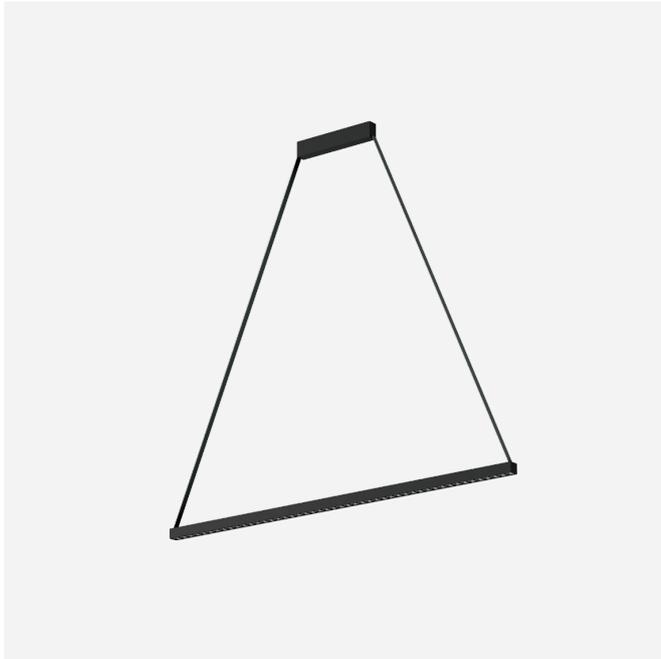

Suspended luminaire made from aluminium; shortable pendant rod suspension max. 2500 mm; surface Black Matt; powder coated; matt texture; PCB 3-step binning; light colour 3000 K; CRI ≥ 90; 220 - 240 V; beam angle 67°; degree of protection IP20; Class 1; inclusive 2 ceiling brackets; driver included;

**LUMINAIRE**

Ceiling \_\_\_\_\_  
 Suspended \_\_\_\_\_  
 Black Matt \_\_\_\_\_  
 IP20 \_\_\_\_\_  
 Interior \_\_\_\_\_  
 1750 lm \_\_\_\_\_

**LED Module**

3000 K \_\_\_\_\_  
 CRI ≥ 90 \_\_\_\_\_  
 ≤ 3 SDCM (initial MacAdam) \_\_\_\_\_

**Optical**


Wide \_\_\_\_\_  
 beam angle 67° \_\_\_\_\_

**Electrical**

incl. driver \_\_\_\_\_  
 220 - 240 V \_\_\_\_\_  
 system 18.0 W \_\_\_\_\_  
 Class I \_\_\_\_\_  
 Standard \_\_\_\_\_

**Physical**

length 1004 mm \_\_\_\_\_  
 width 25 mm \_\_\_\_\_  
 height 25 mm \_\_\_\_\_  
 0.75 kg \_\_\_\_\_  
 cable length max. 2500 mm \_\_\_\_\_

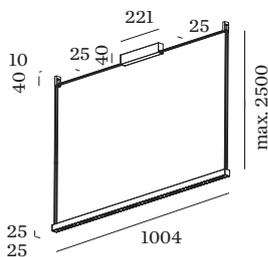

[195174B5] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.