




PROJECT

TYPE

NOTES

QUANTITY

DATE

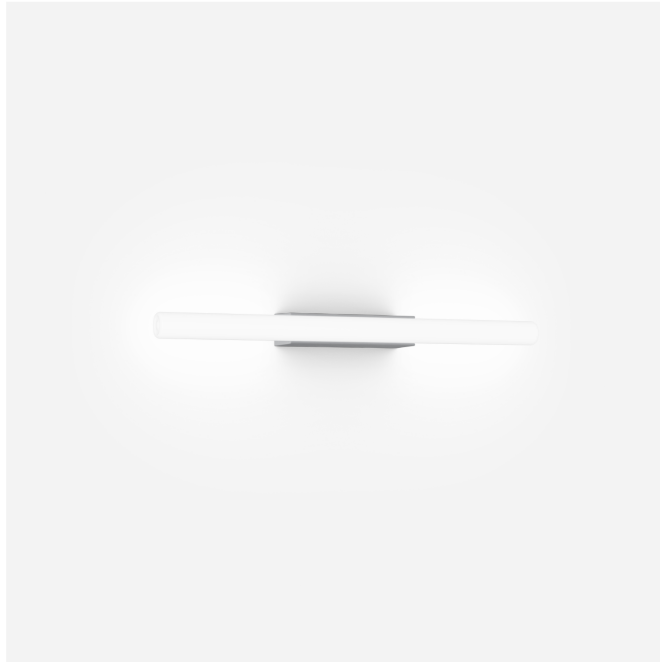

Tubular wall surface luminaire with aluminium base; surface Aluminium Brushed; RAL 9006; opal glass cover; phase-cut dim; light colour 2700 K; CRI ≥ 90 ; degree of protection IP20; Class 2; light source replaceable by end-user;

Luminaire

Wall
Surface
Aluminium Brushed
RAL 9006 ^a
IP20
Interior
700 lm

Module

lamp LED Tube
socket S14d
2700 K
CRI ≥ 90

Optical

Opal

Electrical

phase-cut dim
220 - 240 V
system 7.0 W
Class 2

Physical

length 39 mm
width 66 mm
height 500 mm

^a Colour may deviate slightly due to production conditions

