




**PROJECT** \_\_\_\_\_

**TYPE** \_\_\_\_\_

**NOTES** \_\_\_\_\_

**QUANTITY** \_\_\_\_\_

**DATE** \_\_\_\_\_

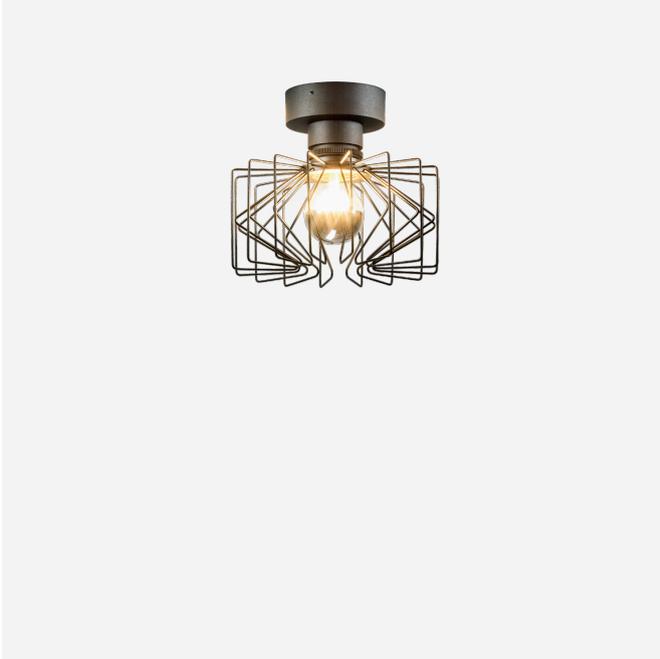

**GENERAL**

Ceiling \_\_\_\_\_  
 Surface \_\_\_\_\_  
 Black Steel \_\_\_\_\_  
 RAL 9011 <sup>a</sup> \_\_\_\_\_  
 IP20 \_\_\_\_\_  
 Interior \_\_\_\_\_


**MEASURED LAMP**

9003E136 \_\_\_\_\_  
 245 lm \_\_\_\_\_  
 5 W \_\_\_\_\_

**LED**

lamp A60 \_\_\_\_\_  
 socket E27 \_\_\_\_\_  
 max. per socket 60 W \_\_\_\_\_  
 2700 K \_\_\_\_\_  
 CRI ≥ 90 \_\_\_\_\_

**LIGHT DISTRIBUTION**

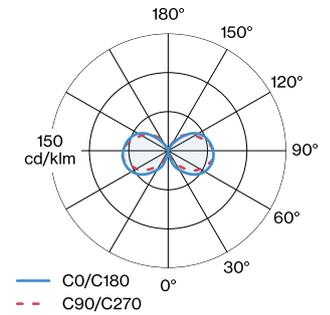

**OPTICAL**

**ELECTRICAL**

220 - 240 V \_\_\_\_\_  
 Class 1 \_\_\_\_\_


**PHYSICAL**

diameter 211 mm \_\_\_\_\_  
 height 110 mm \_\_\_\_\_  
 0.78 kg \_\_\_\_\_



Ceiling surface luminaire; shade made from varnished steel; RAL 9011; lamp socket E27; lamp type A60; 220 - 240 V; degree of protection IP20; Class 1; lamp not included;

<sup>a</sup> Colour may deviate slightly due to production conditions.



[‘2086E0B0’] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.

2086E0B0



## LAMPS

### A60 LED Lamp

Type	Colour	Voltage	Ø·H (MM)	Item number
2200K   E27			60·108	9003E109
2700K   E27			60·110	9003E138