




PROJECT

TYPE

NOTES

QUANTITY

DATE

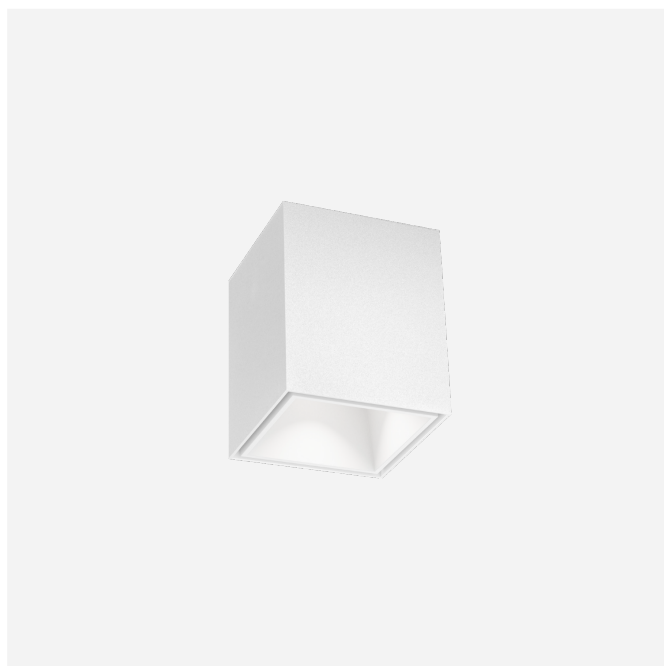

Squared ceiling surface mounted downlight made from die-cast aluminium; surface White Matt; powder coated; matt texture; RAL 9010; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 2700 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90 ; beam angle 30°; degree of protection IP20; Class 1; driver included; light source replaceable by Wever & Ducré or by a professional with explicit authorization; control gear replaceable by end-user;

Luminaire

Ceiling
Surface
White Matt
RAL 9010 ^a
IP20
Interior
440 lm

Module

2700 K
CRI ≥ 90
initial MacAdam ≤ 2 SDCM
initial MacAdam ≤ 2 SDCM

Optical

Standard
beam angle 30°

Electrical

phase-cut dim
220 - 240 V
system 8.0 W
Class 1

Physical

length 70 mm
width 70 mm
height 85 mm
0.25 kg

^a datasheet.footnote.ral_footnote

