



PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____



LUMINAIRE

Ceiling _____
 Suspended _____
 Black Matt _____
 IP20 _____
 Interior _____
 1460 lm _____

LED Module

3000 K _____
 CRI \geq 90 _____
 L80 / 50000h _____
 \leq 3 SDCM (initial MacAdam) _____

Electrical


incl. driver _____
 24 V _____
 system 18.0 W _____
 Class I _____
 Standard _____

Physical

diameter 40 mm _____
 height 1555 mm _____
 2.2 kg _____
 cable length max. 2500 mm _____



Slim, horizontally oriented tubular pendant luminaire made of ribbed glass; aluminium end caps in Black Matt; inclusive adjustable cable suspension max. 2500mm; light colour 3000 K; CRI \geq 90; CRI (Colour Rendering Index) \geq 90; 24 V; degree of protection IP20; Class 1; driver included;

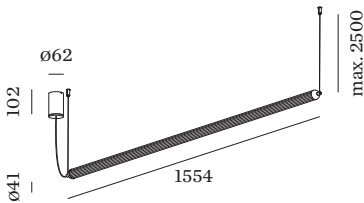

[‘269384B5’] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.