




PROJECT

TYPE


NOTES

QUANTITY

DATE

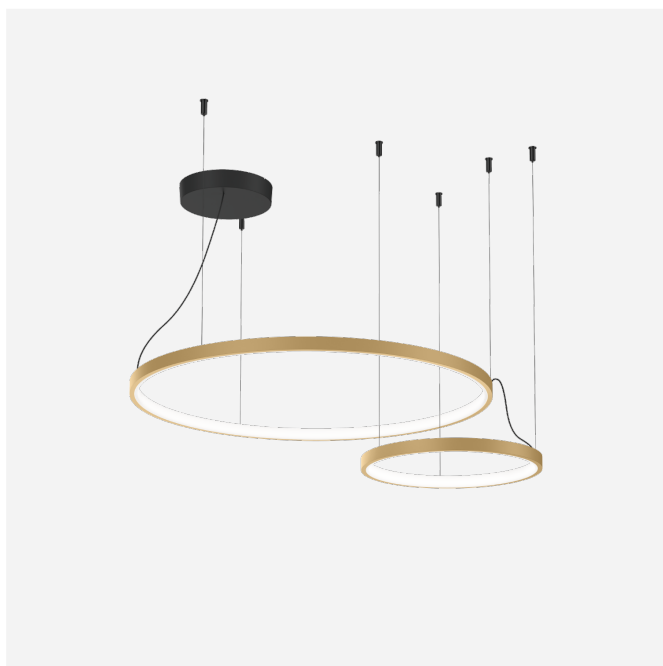

2 ring shaped suspended luminaires made from die-cast aluminium; inclusive adjustable cable suspension max. 4000mm and base in Signal Black; surface Champagne; wet painted, smooth semi glossy; silicone cover; PCB 3-step binning; phase-cut dim; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; 220 - 240 V; degree of protection IP20; Class 2; driver included; light source replaceable by Wever & Ducré or by a professional with explicit authorization; control gear replaceable by end-user;



Luminaire

Ceiling
Suspended
Champagne
IP20
Interior
2330 lm

Module

2700 K
L80 / 100000h
4146 lm
118 lm/W^a

Optical

Opal
CIE flux code: 23 50 78 50 100

Electrical


phase-cut dim
220 - 240 V
system 40 W
Class 2

Physical

diameter 756 mm
height 25 mm
1.21 kg

^a datasheet.footnote.no-electrical-losses

LIGHT DISTRIBUTION



[271582M3] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.



ELECTRICAL ACCESSORIES

Connector 0.3 m

Type	Colour	Voltage	Length (MM)	Item number
KUJO	Black		300	915210B0
KUJO	White		300	915210W0

Connector 0.6 m

Type	Colour	Voltage	Length (MM)	Item number
KUJO	Black		600	915211B0
KUJO	White		600	915211W0

Connector 0.9 m

Type	Colour	Voltage	Length (MM)	Item number
KUJO	Black		900	915212B0
KUJO	White		900	915212W0

Connector 1.2 m

Type	Colour	Voltage	Length (MM)	Item number
KUJO	Black		1200	915213B0
KUJO	White		1200	915213W0