




PROJECT

TYPE

NOTES

QUANTITY

DATE

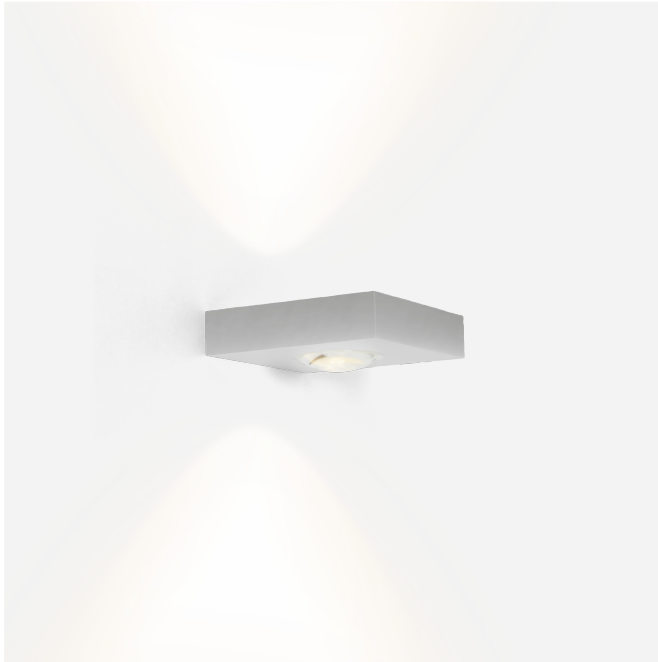

Wall surface luminaire made from aluminium; surface Aluminium Brushed; up and down light emission; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; 220 - 240 V; degree of protection IP20; Class 1; driver included; light source not replaceable; control gear replaceable by end-user;

Luminaire

Wall
Surface
Aluminium Brushed
IP20
Interior
indirect 320 lm
direct 320 lm
total 640 lm

Module

3000 K
CRI ≥ 90
L80 / 100000 h
initial MacAdam ≤ 3 SDCM

Optical

Wide
CIE flux code: 77 100 100 50
100

Electrical

phase-cut dim
220 - 240 V
system 7.7 W
Class 1

Physical

length 130 mm
width 130 mm
height 30 mm
0.9 kg

LIGHT DISTRIBUTION

