




**PROJECT**

**TYPE**


**NOTES**

**QUANTITY**

**DATE**

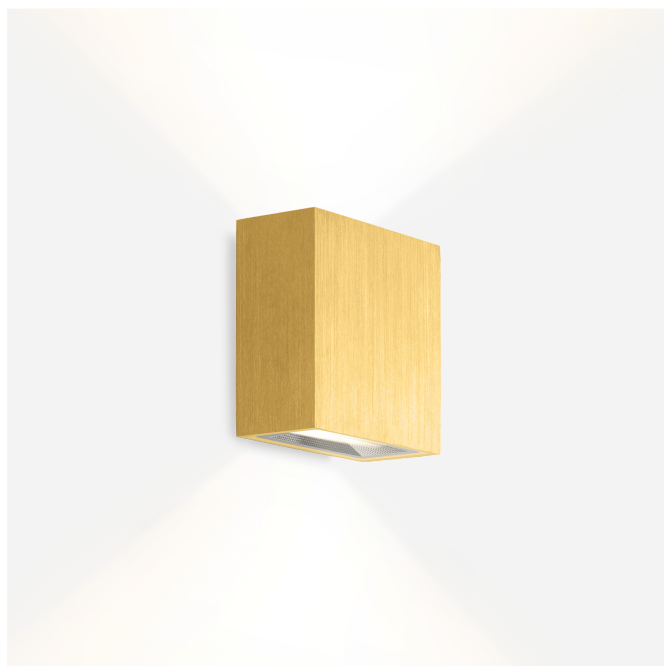

Rectangular wall surface luminaire made from aluminium; surface Gold; wet painted; brushed; up and down light emission; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 2700 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; 220 - 240 V; degree of protection IP20; Class 1; driver included; light source not replaceable; control gear replaceable by end-user;



**Luminaire**

Wall  
Surface  
Gold  
IP20  
Interior  
indirect 310 lm  
direct 310 lm  
total 620 lm

**Module**

2700 K  
CRI  $\geq 90$   
L80 / 100000 h  
initial MacAdam  $\leq 3$  SDCM

**Optical**

Wide  
CIE flux code: 69 95 100 49  
100

**Electrical**

phase-cut dim  
220 - 240 V  
system 8.0 W  
Class 1

**Physical**

length 98 mm  
width 55 mm  
height 98 mm  
0.5 kg

**LIGHT DISTRIBUTION**

