




PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____

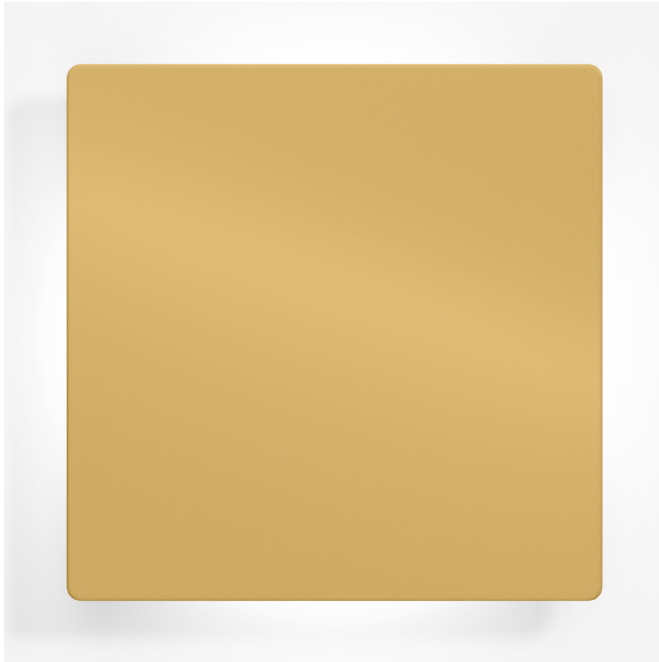

Square shaped wall surface luminaire made from aluminium; Gold wet painted; brushed; PCB 3-step binning; phase-cut dim; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; 220 - 240 V; degree of protection IP20; Class 2; light source replaceable by Wever & Ducré or by a professional with explicit authorization;

Luminaire

Wall _____

Surface _____

Gold _____

IP20 _____

Interior _____

420 lm _____

Module

3000 K _____

CRI ≥ 90 _____

L80 / 70000 h _____

initial MacAdam ≤ 3 SDCM _____

422 lm _____

50 lm/W^a _____

Optical

CIE flux code: 0 2 28 22 100 _____

Electrical

phase-cut dim _____

220 - 240 V _____

system 8.5 W _____

Class 2 _____

Physical


length 300 mm _____

width 300 mm _____


height 38 mm _____

1.56 kg _____

LIGHT DISTRIBUTION



^a Without electrical losses



[‘317678G5’] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.