




PROJECT

TYPE

NOTES

QUANTITY


DATE

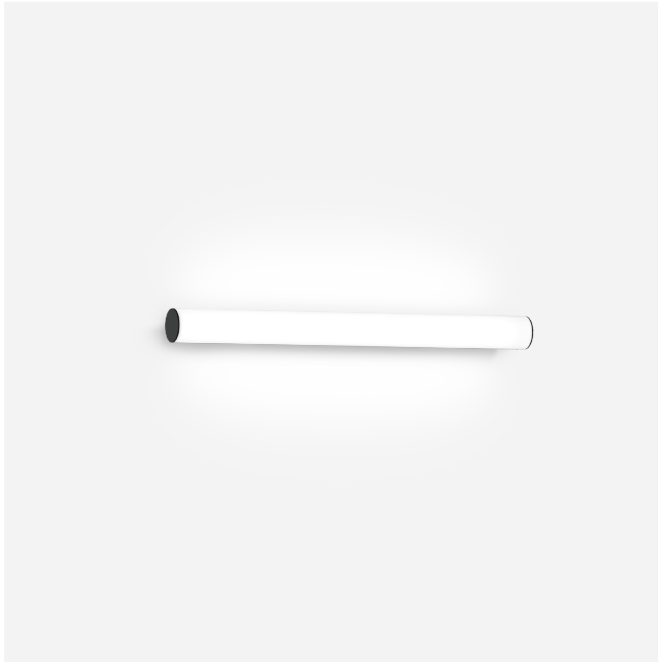

IP44



Tubular wall surface luminaire made from aluminium; surface Black Matt; powder coated; matt texture; opal PMMA; RAL 9011; PCB 3-step binning; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; inclusive output selector (choose between low and high luminosity); degree of protection IP44; Class 1; light source replaceable by Wever & Ducré or by a professional with explicit authorization;



Luminaire

Wall
Surface
Black Matt + Opal PMMA
RAL 9011^a
IP44
Interior
645 lm / High Output
375 lm / Low Output

Module

2700 K
CRI ≥ 90
L80 / 50000h
initial MacAdam ≤ 3 SDCM
377 / 643 lm
97 / 109 lm/W^b

Optical

CIE flux code: 28 54 78 50 100


Electrical

incl. output selector | phase-cut dim
220 - 240 V
system 3.9 / 5.9 W
Class 1

Physical

length 464 mm
width 60 mm
height 40 mm
0.51 kg

LIGHT DISTRIBUTION

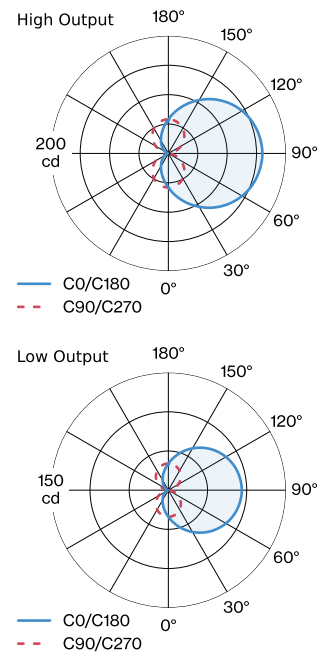

^a datasheet.footnote.ral_footnote

^b datasheet.footnote.no-electrical-losses