




PROJECT

TYPE

NOTES

QUANTITY


DATE

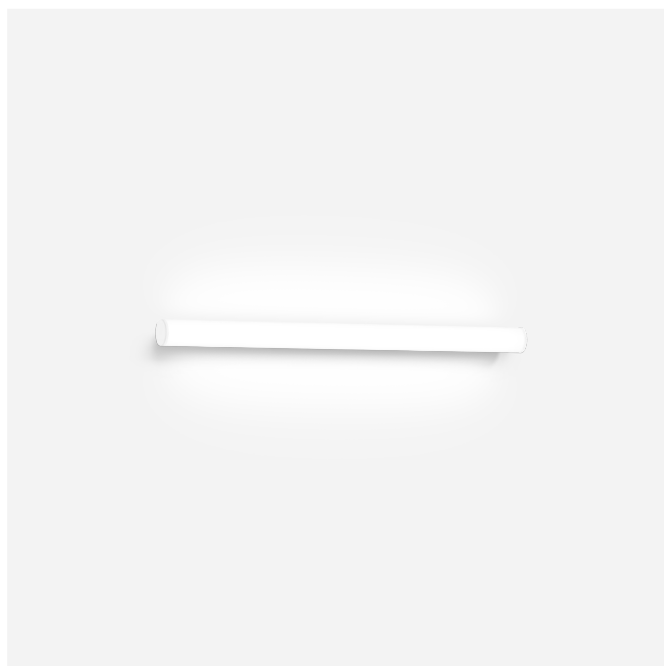

IP44



Tubular wall surface luminaire made from aluminium; surface White Matt; powder coated; matt texture; opal PMMA; RAL 9010; PCB 3-step binning; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; inclusive output selector (choose between low and high luminosity); degree of protection IP44; Class 1; light source replaceable by Wever & Ducré or by a professional with explicit authorization;



Luminaire

Wall
Surface
White Matt + Opal PMMA
RAL 9010 ^a
IP44
Interior
535 lm / Low Output
920 lm / High Output

Module

2700 K
CRI ≥ 90
L80 / 50000h
initial MacAdam ≤ 3 SDCM
571 / 980 lm
98 / 113 lm/W ^b

Optical

CIE flux code: 28 54 78 50 100

Electrical

incl. output selector | phase-cut dim
220 - 240 V
system 5.8 / 8.7 W
Class 1

Physical

length 614 mm
width 60 mm
height 40 mm
0.65 kg

^a datasheet.footnote.ral_footnote

^b datasheet.footnote.no-electrical-losses

LIGHT DISTRIBUTION

