





PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____



Wall surface luminaire made from aluminium; surface Bronze; wet painted, matt smooth; RAL 7013; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 2700 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90 ; 220 - 240 V; degree of protection IP20; Class 1; driver included; light source replaceable by Wever & Ducré or by a professional with explicit authorization; control gear replaceable by end-user;

GENERAL

Wall _____
 Surface _____
 Bronze _____
 RAL 7013 ^a _____
 IP20 _____
 Interior _____
 420 lm _____
 CIE flux code: 16 43 71 50 100 _____

LED

2700 K _____
 CRI ≥ 90 _____
 L80 / 55000h _____
 initial MacAdam ≤ 2 SDCM _____


ELECTRICAL

phase-cut dim _____
 220 - 240 V _____
 system 8.2 W _____
 Class 1 _____


PHYSICAL

length 150 mm _____
 width 65 mm _____
 height 75 mm _____
 0.4 kg _____

LIGHT DISTRIBUTION

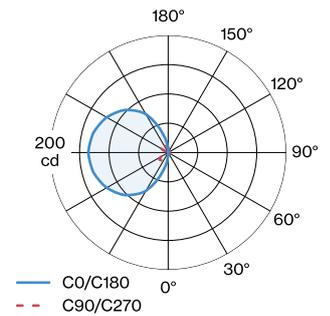

^a Colour may deviate slightly due to production conditions.



[‘330164Q3’] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.