




## PROJECT

## TYPE

## NOTES

## QUANTITY

## DATE

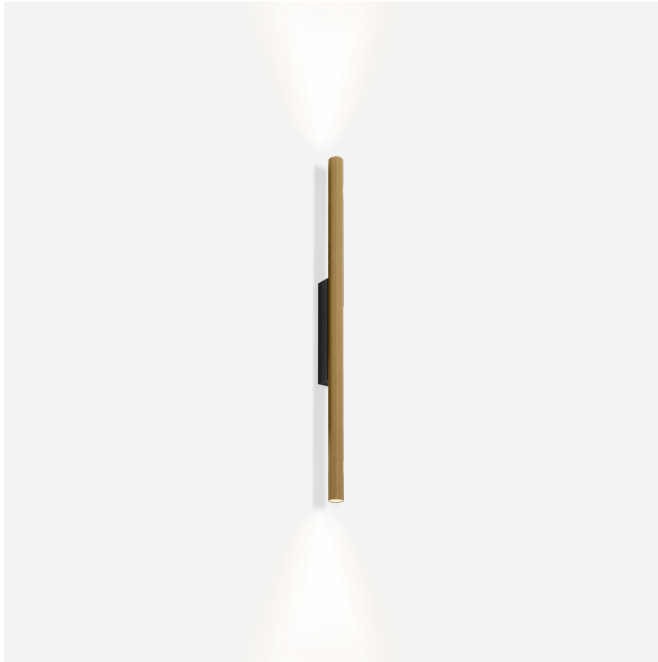

Tubular wall surface luminaire made from aluminium; surface Black Matt + Champagne; powder coated; matt texture + wet painted; smooth semi glossy; RAL 9011; up and down light emission; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 3000 K; binning initial MacAdam  $\leq 2$  SDCM; CRI  $\geq 90$ ; beam angle 23°; 220 - 240 V; degree of protection IP20; Class 1; UGR  $\leq 10$ ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65°  $\leq 1500$  cd/m<sup>2</sup>; driver included; light source replaceable by Wever & Ducré or by a professional with explicit authorization; control gear replaceable by end-user;

## Luminaire

Wall  
Surface  
Black Matt + Champagne  
RAL 9011<sup>a</sup>  
IP20  
Interior  
indirect 420 lm  
direct 420 lm  
total 840 lm


## Module

3000 K  
CRI  $\geq 90$   
L80 / 50000h  
initial MacAdam  $\leq 2$  SDCM

## Optical

Standard  
beam angle 23°  
CIE flux code: 100 100 100 52 100

## LIGHT DISTRIBUTION



## Electrical

phase-cut dim  
220 - 240 V  
system 11.4 W  
Class 1

## Physical

diameter 28 mm  
height 600 mm  
0.49 kg

<sup>a</sup> Colour may deviate slightly due to production conditions

