




PROJECT

TYPE


NOTES

QUANTITY

DATE

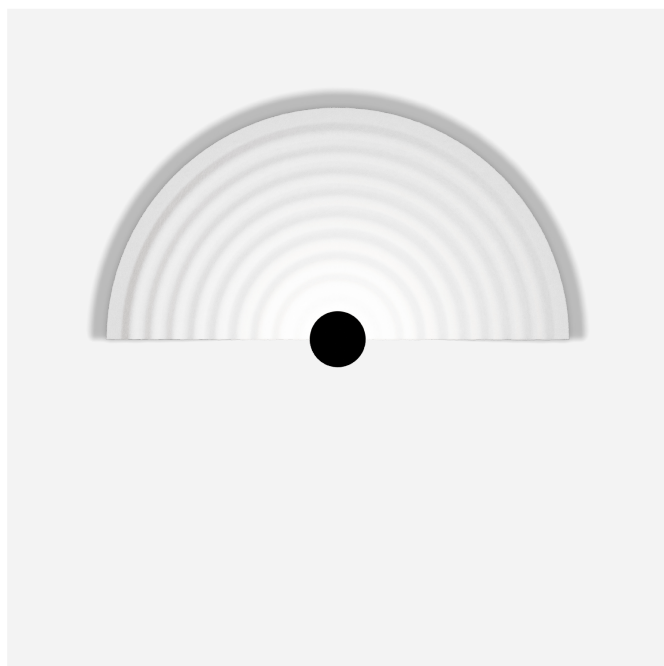

Wall surface luminaire integrated in an acoustic element made of high quality PET felt with sound absorbing properties; 100% recyclable; surface Felt White; PCB 3-step binning; phase-cut dim; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; indirect light distribution; 220 - 240 V; degree of protection IP20; Class 1; driver included;



Luminaire

Wall
Surface
Felt White
IP20
Interior
470 lm

Module

3000 K
CRI ≥ 90
L80 / 50000h
initial MacAdam ≤ 3 SDCM
553 lm
92 lm/W^a

Optical

CIE flux code: 12 40 73 85 100

Electrical

phase-cut dim
220 - 240 V
system 8.3 W
Class 1

Physical

length 650 mm
width 325 mm
height 120 mm
1.08 kg

^a Without electrical losses

LIGHT DISTRIBUTION

