




**PROJECT**

**TYPE**


**NOTES**

**QUANTITY**

**DATE**

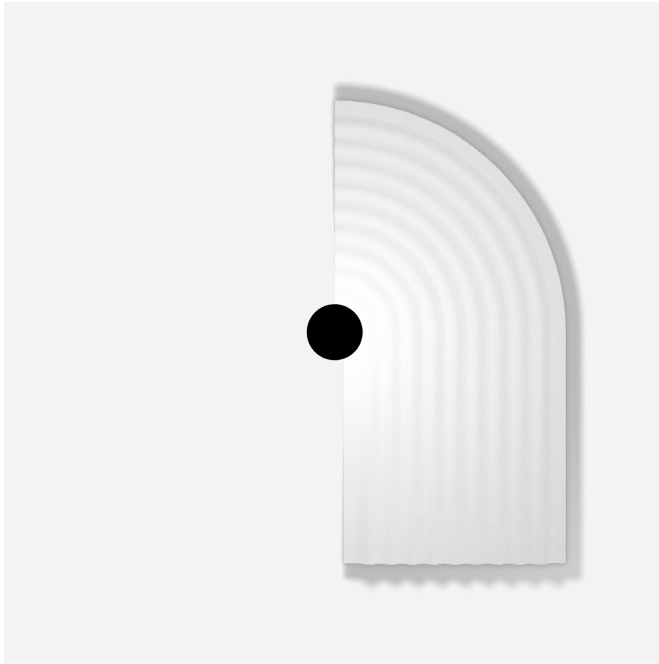

Wall surface luminaire integrated in an acoustic element made of high quality PET felt with sound absorbing properties; 100% recyclable; surface Felt White; PCB 3-step binning; phase-cut dim; light colour 3000 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; indirect light distribution; 220 - 240 V; degree of protection IP20; Class 1; driver included;



**Luminaire**

Wall  
Surface  
Felt White  
IP20  
Interior  
470 lm

**Module**

3000 K  
CRI  $\geq 90$   
L80 / 50000h  
initial MacAdam  $\leq 3$  SDCM  
553 lm  
92 lm/W<sup>a</sup>

**Optical**

CIE flux code: 12 40 73 85 100

**Electrical**

phase-cut dim  
220 - 240 V  
system 8.3 W  
Class 1

**Physical**

length 325 mm  
width 650 mm  
height 120 mm  
1.14 kg

<sup>a</sup> Without electrical losses

**LIGHT DISTRIBUTION**

