





PROJECT

TYPE

NOTES

QUANTITY

DATE

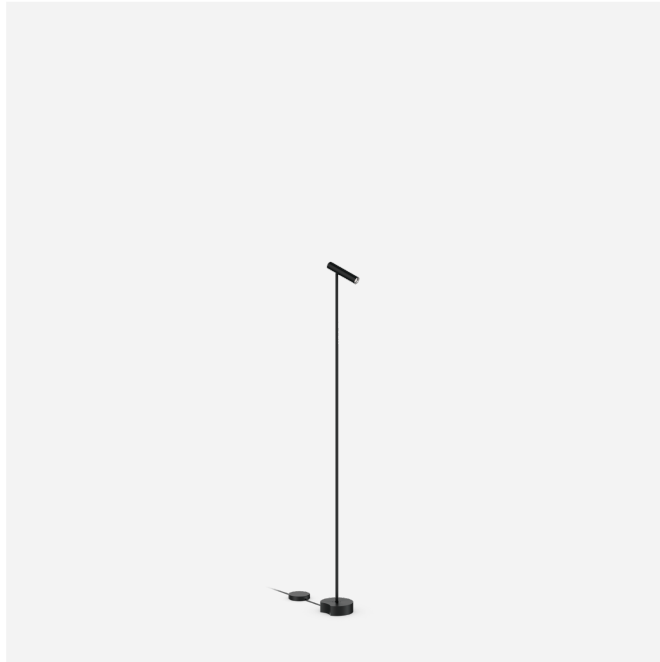


Free standing luminaire made from aluminium; surface Black Matt; powder coated; matt texture; RAL 9011; with COB (Chip on Board) technology for maximum efficiency; light colour 2700 K; CRI ≥ 90 ; beam angle 30°; spotlight head 360° rotatable and 145° tiltable; degree of protection IP20; Class 3; cable plug with dimmer switch; driver included; light source replaceable by Wever & Ducré or by a professional with explicit authorization;



DATASHEET.QUICKSUM.LUMINAIRE LIGHT DISTRIBUTION

Floor
Surface
tilt max 145 °
rotation 360 °
Black Matt
RAL 9011 ^a
IP20
Interior
505 lm
505 lm



DATASHEET.QUICKSUM.MODULE — C0/C180

2700 K
CRI ≥ 90
L80 / 50000h
initial MacAdam ≤ 3 SDCM
507 lm
67 lm/W

DATASHEET.QUICKSUM.OPTICAL

Standard
beam angle 30°
UGR ≤ 19
CIE flux code: 97 100 100 100
100

DATASHEET.QUICKSUM.ELECTRICAL

dimmable
220 - 240 V
system 7.6 W
Class 3

DATASHEET.QUICKSUM.PHYSICAL

diameter 27 mm
height 127 mm
2.83 kg
cable plug with dimmer switch

^a Colour may deviate slightly due to production conditions.