




PROJECT

TYPE


NOTES

QUANTITY

DATE

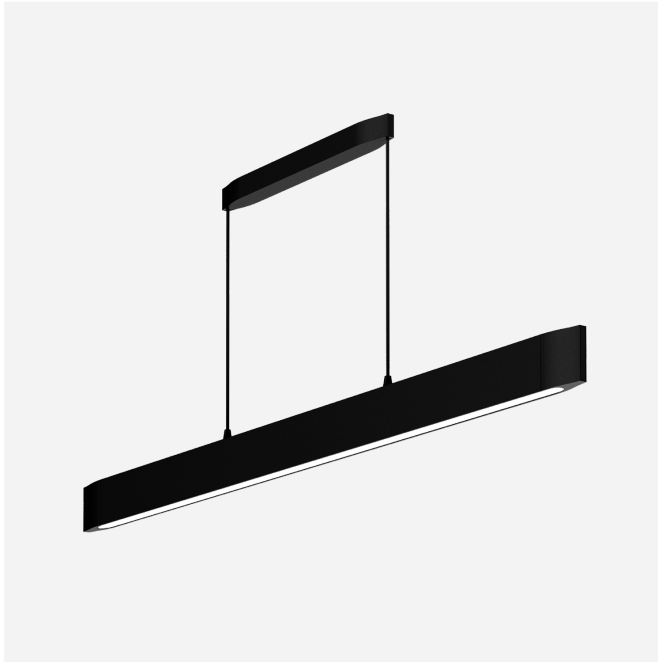

Ceiling suspended luminaire made from aluminium; surface Black Matt; powder coated; matt texture; RAL 9011; opal PMMA cover; PCB 3-step binning; phase-cut dim; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; 220 - 240 V; degree of protection IP20; Class 1; light source replaceable by Wever & Ducré or by a professional with explicit authorization;



Luminaire

Ceiling
Suspended
Black Matt
RAL 9011 ^a
IP20
Interior
1110 lm

Module

3000 K
CRI ≥ 90
L80 / 50000h
initial MacAdam ≤ 3 SDCM
2211 lm
113 lm/W ^b

Optical

Opal
CIE flux code: 48 80 96 100
100


Electrical

phase-cut dim
220 - 240 V
system 19.5 W
Class 1

Physical

length 1314 mm
width 30 mm
height 80 mm
2 kg
cable length 2000 mm

LIGHT DISTRIBUTION



^a datasheet.footnote.ral_footnote

^b datasheet.footnote.no-electrical-losses