



PROJECT

TYPE

NOTES

QUANTITY

DATE


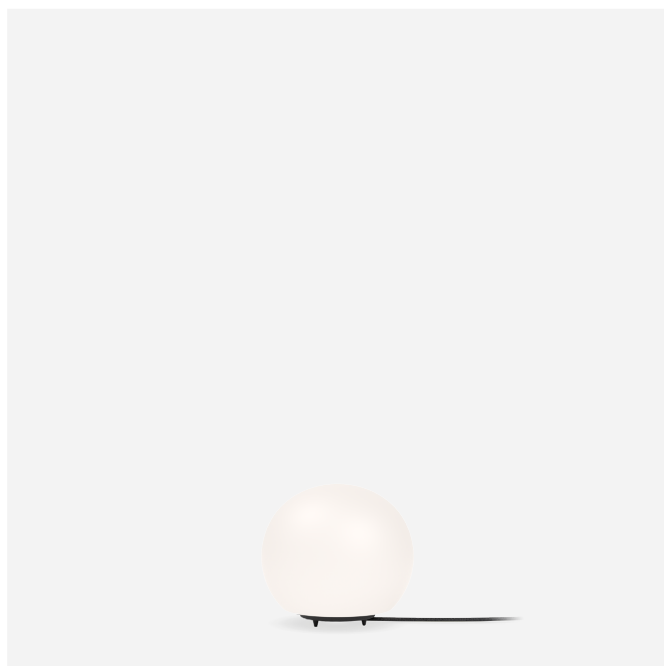


Table and floor luminaire; italian hand blown white opal glass; mounting made from aluminium in Black Matt; powder coated; matt texture; cable plug with switch; lamp socket G9; lamp type QT14; max. 5W; 220 - 240 V; degree of protection IP20; Class 2; lamp not included;



General

Wall
Surface
Black Matt + White Opal Glass
IP20
Interior
260 lm

LED

lamp QT14
socket G9
max. per socket 5.0 W
3000 K
CRI ≥ 80
 ≤ 6 SDCM (initial MacAdam)

Optical

Opal
UGR ≤ 16
CIE flux code: 16 39 68 40 87
 $\geq 65^\circ < 1500 \text{ cd/m}^2$


Electrical

220 - 240 V
inset 3.0 W ^a
Class II

Physical

diameter 130 mm
height 120 mm
0.41 kg
cable plug with switch

LIGHT DISTRIBUTION



^a Without electrical and optical losses



LAMPS

QT14 LED Lamp

Type	Colour	Voltage	Ø·H (MM)	Item number
2700K G9			16-52	9010G802
2700K G9			19-49	9010G803
3000K G9			18-49	9010G804
3000K G9			19-49	9010G805
3000K G9			17-54	9019G703