




PROJECT

TYPE

NOTES

QUANTITY


DATE

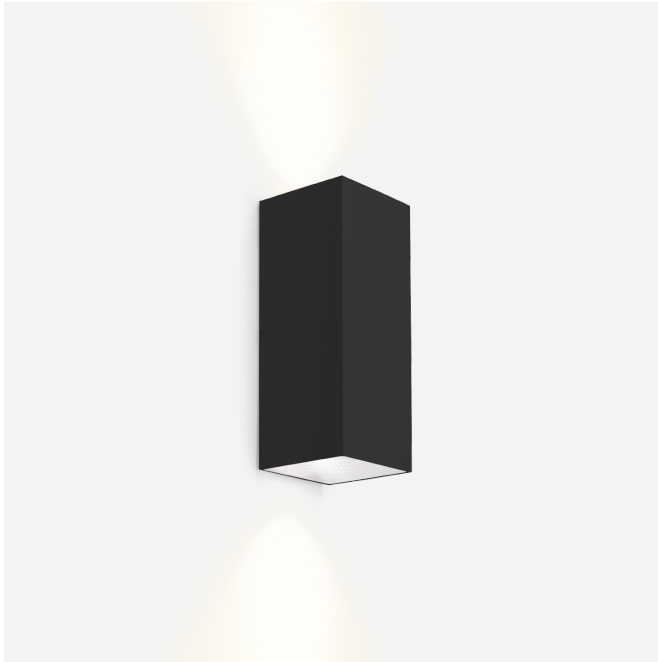

IP65



Rectangular wall surface luminaire made from aluminium; surface Black Matt; powder coated; matt texture; RAL 9011; up and down light emission; beam angle 38°; PCB 3-step binning; phase-cut dim; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; 220 - 240 V; degree of protection IP65; Class 1; light source not replaceable;



Luminaire

Wall
Surface
Black Matt
RAL 9011 ^a
IP65
Exterior
indirect 375 lm
direct 375 lm
total 750 lm

LED Module

3000 K
CRI ≥ 90
L70 / 55000h
 ≤ 3 SDCM (initial MacAdam)

Optical

Medium (standard)
beam angle 38°

Electrical

phase-cut dim
220 - 240 V
system 8.6 W
Class 1

Physical

length 50 mm
width 50 mm
height 120 mm
0.35 kg

^a Colour may deviate slightly due to production conditions