



Description: 1-gang switch insert (1-pole, 2-way)

Ref.-no.: 506 U

illumination possible with lamp

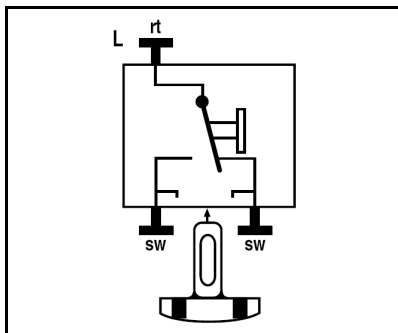

Contact assignments

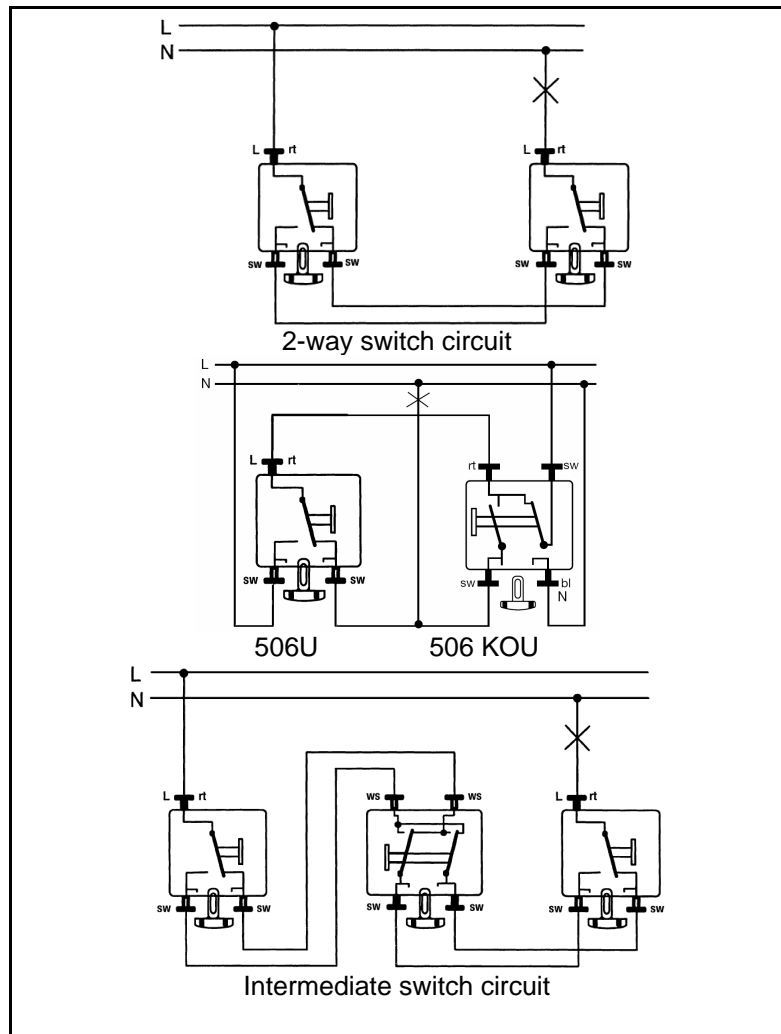

Wiring diagrams
506 U

Technical data

Switching voltage:	AC 250 V ~
Switching current:	10 AX
Connection:	screwless terminals
Switch type:	1-pole, 2-way

Accessories

Lamp:	Ref.-no.:	90 (230 V, 1.1 mA)
	Ref.-no.:	95 (230 V, 0.5 mA)
	Ref.-no.:	96-12 (12 V, 40 mA)

Ref.-no.: 96-24 (24 V, 25 mA)
Ref.-no.: 96-36 (36 V, 20 mA)
Ref.-no.: 96-48 (48 V, 25 mA)

LED-lamp: Ref.-no.: 961248 LED RT (rot 12 – 48 V, ca. 4 mA)
Ref.-no.: 961248 LED GN (grün 12 – 48 V, ca. 4 mA)
Ref.-no.: 90-LED RT (rot 230 V, ca. 1.1 mA)
Ref.-no.: 90-LED GN (grün 230 V, ca. 1.1 mA)