

06 Downlights Fixed LED>The COB Downlight Range Die Cast

10107CA/W/W



7W LED recessed downlight, IP20. Ideal for general lighting applications.

Complete with 300mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

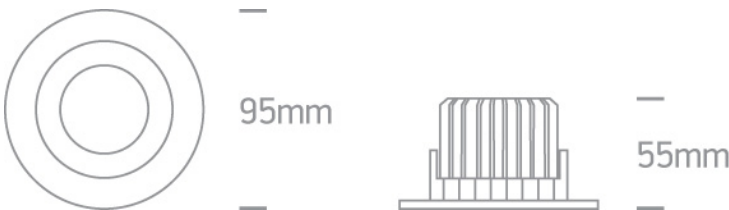

Gallery






Physical Specification

Item Group	06 Downlights Fixed LED
Family	The COB Downlight Range Die Cast
Order Code	10107CA/W/W
Colour	White
Material	Die Cast
Shape	Circular
Height	55mm

Diameter	95mm
Cutout Hole Diameter	75mm
Recessed Ceiling	Yes
Depth Required	70mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	7W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	300mA
Voltage	21V
Safety Class	
Power(Watts)	6,3W
IP Rating	IP20
Light Source	LED built in
LED Type	COB
LED Brand	Epistar

F Mark



Gear

Gear Type
Input Voltage
50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
300mA
IP Rating
Safety Class
Dimmable
Ambient Temp
Operating Temp
Housing Material
Output Terminal
Brand
Protection

Led Driver
220-240V
Yes
Yes
4,2-7,2W
0,9
Yes
14-24V
IP20
No
45°C
85°C
Plastic
Cable
Lifud
Short Circuit and Overload

Illumination Data


Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram

3000K
560lm
80lm/W
80
60°

Packing Info

Box Length	12,5cm
Box Width	6cm
Box Height	10,5cm
Box Weight	0,240Kg
Pcs/Carton	50
Barcode	5291889051961
HS Code	9405409900

Energy Label

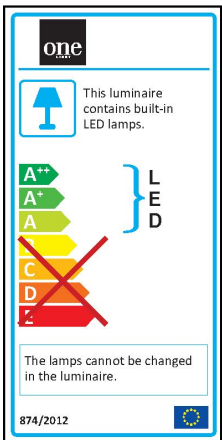

Certification & Warranty

Warranty	2 Years
Average Lifetime	30000hrs
Weee Directive	Yes

switch to
one light!

