06 Downlights Fixed LED>Dark Light Pro Range Aluminium

10108ED/W/B/W

8W COB LED recessed downlight, for general lighting applications.

Complete with 300mA driver.
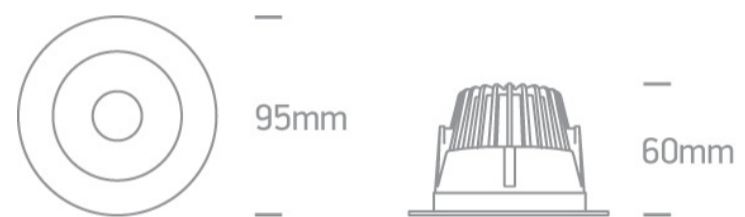
Complies with standard EN60598-1 and any other specific standards.

IP20 80 CRI DARK LIGHT CE

Downloads

IES

Dimensions

95mm

60mm

Physical Specification	
Item Group	06 Downlights Fixed LED
Family	Dark Light Pro Range Aluminium
Order Code	10108ED/W/B/W
Colour	White-Black
Material	Aluminium
Shape	Circular
Height	60mm
Diameter	95mm
Cutout Hole Diameter	75mm
Recessed Ceiling	Yes
Depth Required	80mm
Indoor	Yes

one LIGHT

Adjustable	No

Gear	External-Included

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	▢
Power(Watts)	8W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F

Fitting

Input Type	Constant Current
Input Current	300mA
Voltage	20V
Safety Class	III
Power(Watts)	6W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Sanan
LED Number	1
F Mark	F

Gear

Gear Type	Led Driver

one
LIGHT

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	4,2-7,2W
Power Factor	0,5
Constant Current	Yes
300mA	14-24V
IP Rating	IP20
Safety Class	▢
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	LIFUD

Illumination Data

Colour Temperature	3000K
Lumen Output	480lm
Light Efficiency	60lm/W
CRI	80
Beam Angle	60°
Illumination Diagram	
Dark Light	Yes

Packing Info

Box Length	11,5cm
Box Width	11,5cm
Box Height	8cm
Pcs/Carton	50
Barcode	5291889058649
HS Code	9405409900

one

This luminaire contains built-in LED lamps.

LED

The lamps cannot be changed in the luminaire.

874/2012

Warranty	2 Years
Weee Directive	Yes

switch to
one light!

one
LIGHT