


06 Downlights Fixed LED>UGR19 Office Range

10110U/W/W

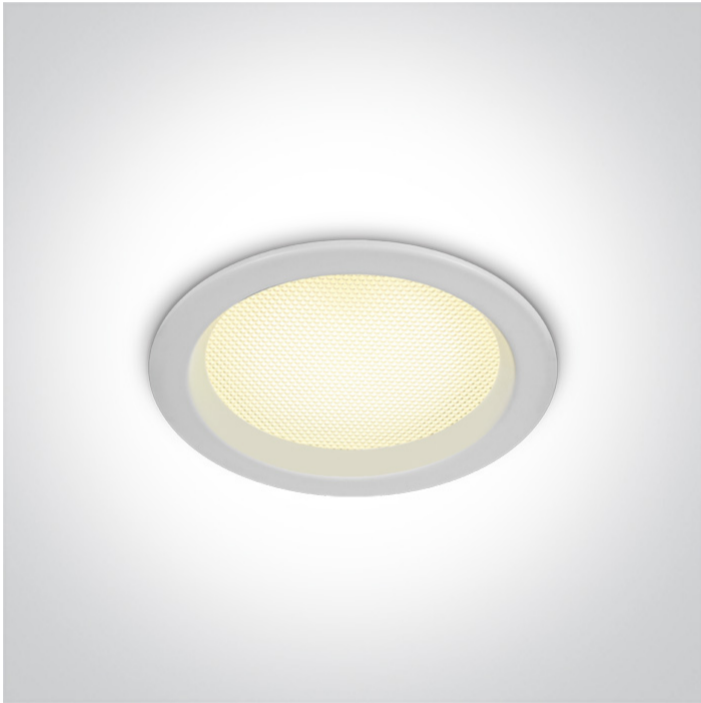

10W SMD LED UGR19 downlight, IP44.

Complete with 200mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

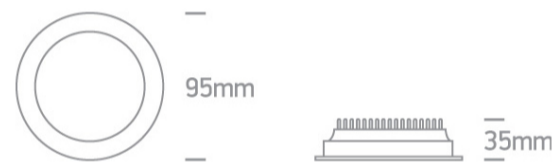

Gallery






Physical Specification

Item Group	06 Downlights Fixed LED
Family	UGR19 Office Range
Order Code	10110U/W/W
Colour	White
Material	Die Cast
Shape	Circular
Height	35mm

Diameter	95mm
Cutout Hole Diameter	86mm
Recessed Ceiling	Yes
Depth Required	55mm
Indoor	Yes
Adjustable	No
IK Rating	4

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	10W
IP Rating	IP44
Light Source	LED built in
Dimmable	No
F Mark	


Fitting	
Input Type	Constant Current
Input Current	200mA
Voltage	38V
Safety Class	
Power(Watts)	9,6W
IP Rating	IP44
Light Source	LED built in
LED Type	SMD 2835

LED Brand
F Mark

Epistar


Gear

Gear Type
Input Voltage
50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
200mA
IP Rating
Safety Class
Dimmable
Housing Material
Output Terminal
Brand
Protection

Led Driver
220-240V
Yes
Yes
5,4-8,4W
0,9
Yes
27-42V
IP44

No
Plastic
Cable
Lifud
Short Circuit and Overload

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Illumination Diagram
UGR

3000K
750lm
75lm/W
80

19

Packing Info

Pcs/Carton

40


Barcode

5291889065333

HS Code

9405409900

Energy Label

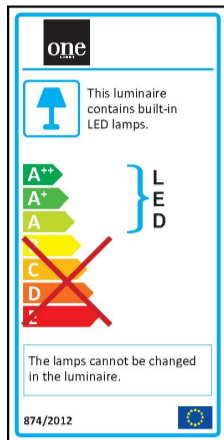

Certification & Warranty

Warranty

3 Years

Average Lifetime

30000hrs

Weee Directive

Yes

switch to
one light!

one
LIGHT

