

02 Recessed Spots Fixed LED>The COB IP65 Bathroom High Power

10112P/W/C



12W COB LED recessed spot, IP65, for general application. Suitable for bathroom installation.

Requires 700mA constant current driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

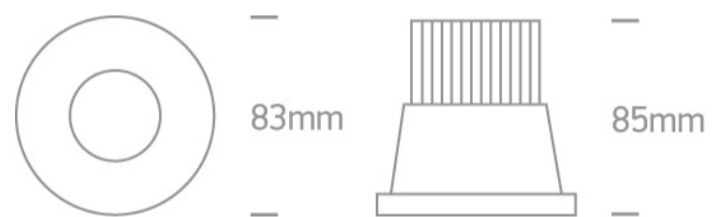

Gallery



Must be ordered separately



89015A



89015AT


Physical Specification

| | |
|----------------------|----------------------------------|
| Item Group | 02 Recessed Spots Fixed LED |
| Family | The COB IP65 Bathroom High Power |
| Order Code | 10112P/W/C |
| Colour | White |
| Material | Die Cast |
| Shape | Circular |
| Height | 85mm |
| Diameter | 83mm |
| Cutout Hole Diameter | 68mm |
| Recessed Ceiling | Yes |
| Depth Required | 105mm |
| Indoor | Yes |
| Outdoor | Yes |
| Adjustable | No |

Electrical Characteristics


| | |
|---------------|------------------|
| Fitting | |
| Input Type | Constant Current |
| Input Current | 700mA |
| Safety Class | III |
| Power(Watts) | 12W |
| IP Rating | IP65 |
| Light Source | LED built in |

| |
|--------------|
| LED Type |
| LED Brand |
| Cable Length |
| F Mark |

| |
|---|
| COB |
| Epistar |
| 40cm |
|  |

Illumination Data

| |
|----------------------|
| Colour Temperature |
| Lumen Output |
| Light Efficiency |
| CRI |
| Beam Angle |
| Illumination Diagram |
| Dark Light |

| |
|---|
| 4000K |
| 1100lm |
| 91,67lm/W |
| 80 |
| 40° |
|  |
| Yes |

Packing Info

| |
|------------|
| Box Length |
| Box Width |
| Box Height |
| Box Weight |
| Pcs/Carton |
| Barcode |
| HS Code |

| |
|---------------|
| 9cm |
| 9cm |
| 10cm |
| 0,326kg |
| 50 |
| 5291889045724 |
| 9405409900 |

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

