

06 Downlights Fixed LED>The Dark Light Dome Reflector Die cast

10116FD/W/BS



16W LED Dark Light Dome Reflector, IP20.

Complete with 300mA driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Gallery






Physical Specification

Item Group	06 Downlights Fixed LED
Family	The Dark Light Dome Reflector Die cast
Order Code	10116FD/W/BS
Colour	White-Brass
Material	Die Cast
Shape	Circular
Height	50mm

Diameter	170mm
Cutout Hole Diameter	155mm
Recessed Ceiling	Yes
Depth Required	80mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	16W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	300mA
Voltage	50V
Safety Class	
Power(Watts)	15W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Sanan

Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

13,5-18W

Power Factor

0,9

Constant Current

Yes

300mA

45-60V

IP Rating

IP20

Safety Class



Dimmable

No

Housing Material

Plastic

Output Terminal

Cable

Brand

Kegu

Protection

Short Circuit and Overload

Illumination Data

Colour Temperature

3000K

Lumen Output

800lm

Light Efficiency

50lm/W

CRI

80

Illumination Diagram



Dark Light

Yes

Packing Info

Box Length


19,5cm

Box Width

17,5cm

Box Height	5,5cm
Box Weight	0,38Kg
Pcs/Carton	20
Barcode	5291889065593
HS Code	9405409900

Energy Label

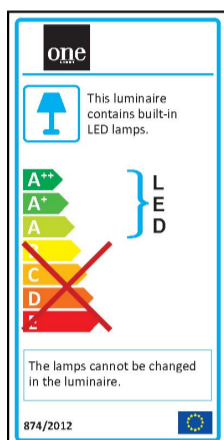

Certification & Warranty

Warranty	2 Years
Average Lifetime	30000hrs
Weee Directive	Yes

switch to
one light!

one
LIGHT

