




Product Datasheet

06 Downlights Fixed LED>The IP54 Dark Light Bathroom Downlights Die cast

10120FD/W/C

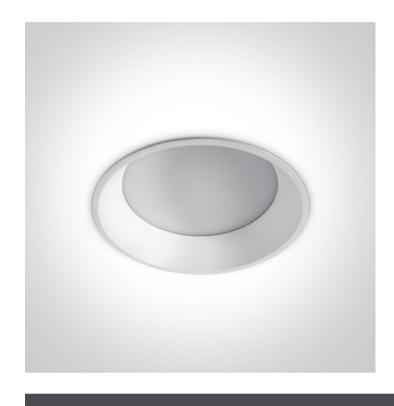

20W Dark Light SMD LED recessed downlight ideal for bathroom installation, IP54.

Complete with 300mA driver.

Complies with standard EN60598-1 and any other specific standards.













Downloads










Dimensions





Gallery



Physical Specification


Item Group	06 Downlights Fixed LED
Family	The IP54 Dark Light Bathroom Downlights Die cast
Order Code	10120FD/W/C
Colour	White
Material	Die Cast
Shape	Circular
Height	54mm

Diameter	175mm
Cutout Hole Diameter	166mm
Recessed Ceiling	Yes
Depth Required	70mm
Indoor	Yes
Outdoor	Yes
Adjustable	No
Electrical Characteristics	
Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	20W
IP Rating	IP54
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	300mA
Voltage	65V
Safety Class	
Power(Watts)	19,5W
IP Rating	IP54
Light Source	LED built in
LED Type	SMD 2835

LED Brand	Epistar
F Mark	F
Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	6-9W
Power Factor	0,9
Constant Current	Yes
300mA	20-30V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	Kegu
Illumination Data	
Colour Toron aretura	40001/
Colour Temperature	4000K
Light Efficiency	1700lm
Light Efficiency CRI	85lm/W 80
	00
Illumination Diagram Dark Light	Voc
Dark Light	Yes
Packing Info	
Box Length	18,5cm
Box Width	7,5cm

Box Height	18,5cm
Box Weight	0,55kg
Pcs/Carton	20
Barcode	5291889051435
HS Code	9405409900

Energy Label



Certification & Warranty

Warranty	2 Years
Weee Directive	Yes

switch to one light!

